

1375

STANDARD SPECIFICATIONS

FRAME

The injection molded styrene compound is noted for its durability and strength. The frame walls are 0.080" thick, and the color is uniform throughout.

DIFFUSER

Translucent, UV stabilized white acrylic, injection molded to the shape of its frame. The diffuser is installed in the frame with hardware.

PAN

Formed aluminum design, finished in a powder coat high reflectance white paint.

ELECTRICAL

Quad CFL, 4-pin G24q Base 2700K lamp – 120-277V Electronic HPF Ballast

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 1375 series is available in standard molded nickel tone or bronze. Optional finishes include all Brownlee paints.

PROJECT:

MODEL #:


FIXTURE TYPE:



MB finish



NT finish

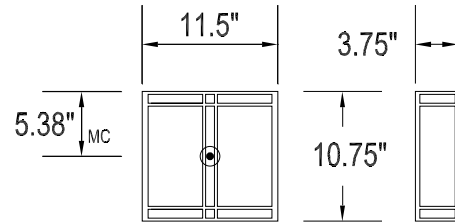

DAMP

WET
(optional)



ADA

ORDERING INFORMATION

1375

Model

2.

3.

4. (if required)

2. FINISH

STANDARD
NT Nickel Tone

OPTIONAL
BL Black
BZ Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
PL Platinum
WH White

CUSTOM
Provide color sample or RAL code to match

3. WATTAGE

13Q 1-13W Quad CFL, elec. HPF
213Q 2-13W Quad CFL, elec. HPF
18Q 1-18W Quad CFL, elec. HPF
218Q 2-18W Quad CFL, elec. HPF
26Q 1-26W Quad CFL, elec. HPF

4. AVAILABLE OPTIONS

BAC Buy American Compliant
DIM1 Dimming Ballast (120V)
DIM2 Dimming Ballast (277V)
ES ENERGY STAR® (26Q only)
W Wet Location

ACCESSORIES (field installed)

BBR¹ Remote Battery Backup
BBRC¹ Remote Battery Backup, Cold Weather

1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.