

# 1380 LED

## STANDARD SPECIFICATIONS

### FRAME

Cold rolled steel, roll formed and assembled with rivets. The assembly has multiple stiffening edges for durability.

### DIFFUSER

Translucent, UV stabilized white acrylic. The material is flexible to withstand minor impact without breaking.

### PAN

Formed, cold rolled steel design, finished with a powder coat high reflectance white paint.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Standard 3500K source lumens noted. Consult Brownlee.com for performance of all CCTs.

B06 - 6W nominal, .05 A input - 700 lm - 117 lm/W. Non-dimming.

B12 - 12W nominal, .10 A input - 1430 lm - 123 lm/W. Dimmable (0-10V).

C09 - 9W nominal, .10 A input - 1200 lm - 144 lm/W. Dimmable (0-10V).

C17 - 16W nominal, .15 A input - 2050 lm - 132 lm/W. Dimmable (0-10V).

C24 - 23W nominal, .20 A input - 2950 lm - 131 lm/W. Dimmable (0-10V).

### MOUNTING

Directly to j-box (by others). Mounting hardware included.

### FINISH



The 1380 series is available in all Brownlee paint finishes as a standard offering.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

### ORDERING INFORMATION

PROJECT:
MODEL #:
FIXTURE TYPE:

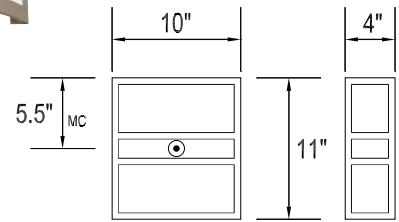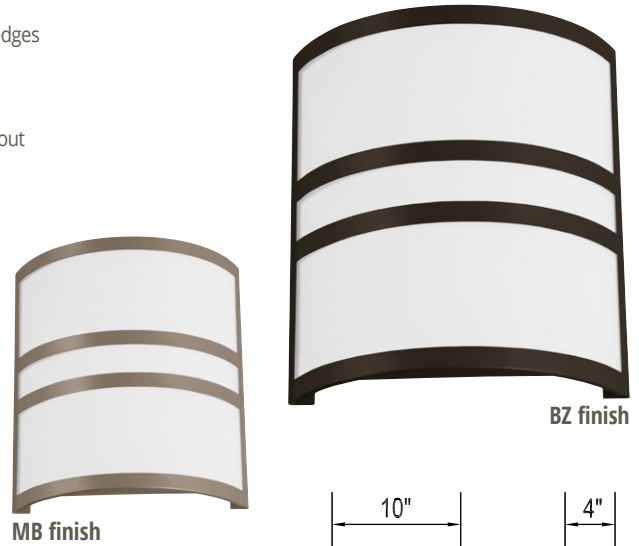

DAMP



## 1380

Model                    2.                    3.                    4.                    5.

### 2. FINISH

#### STANDARD

AB	Antique Bronze
AS	Antique Silver
BL	Black
BZ	Bronze
DB	Desert Bronze
GM	Gun Metal
MB	Metallic Bronze
MG	Metallic Gold
NT	Nickel Tone
PL	Platinum
WH	White

#### CUSTOM

Provide color sample or RAL code to match

### 3. WATTAGE

<b>B06</b>	6W B Series LED
<b>B12</b>	12W B Series LED
<b>C09</b>	9W C Series LED
<b>C17</b>	16W C Series LED
<b>C24</b>	23W C Series LED

### 4. COLOR TEMPERATURE

<b>35K</b>	3500K standard color temperature
<b>27K</b>	2700K color temperature
<b>30K</b>	3000K color temperature
<b>40K</b>	4000K color temperature

### 5. AVAILABLE OPTIONS

<b>90R<sup>0</sup></b>	90 CRI (3000K only)
<b>BAC<sup>1</sup></b>	Buy American Compliant
<b>BLD<sup>3**</sup></b>	Bi-Level Dimming (All except B06)
<b>DTR<sup>4</sup></b>	Triac (Line Voltage) Dimming (120V) (All except B06)
<b>ES<sup>6</sup></b>	ENERGY STAR® (Not available in 90 CRI)
<b>FCL<sup>7</sup></b>	French Canadian Labels
<b>OCC<sup>8</sup></b>	Occupancy Sensor
<b>T24<sup>9</sup></b>	Title 24 Compliant (B12 & C24 in 3000K only)
<b>TBC</b>	Top/Bottom Covers (Perforated)

**Notes:** (0) 90R - cannot be combined with ES or T24 (1) BAC - cannot be combined with FCL (2) BBI/BBS/BBC - cannot be combined with DTR, ECW, EXT, or T24 (3) BLD - cannot be combined with DTR, OCC, or T24 (4) DTR - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) ECW - cannot be combined with BBI, BBC, or DTR (6) ES - cannot be combined with 90R, DTR, FCL, or T24 (7) FCL - cannot be combined with BAC, ES, or T24 (8) OCC - cannot be combined with BLD (9) T24 - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) BBS - cannot be combined with BLD, DTR, ECW, EXT, or T24 (11) PCH/PC4 - cannot be combined with BLD or OCC

**Add'l Notes:** \*BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. \*\*BLD - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

