

1380 LED

STANDARD SPECIFICATIONS

FRAME

Cold rolled steel, roll formed and assembled with rivets. The assembly has multiple stiffening edges for durability.

DIFFUSER

Translucent, UV stabilized white acrylic. The material is flexible to withstand minor impact without breaking.

PAN

Formed, cold rolled steel design, finished with a powder coat high reflectance white paint.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B06 - 6W nominal, .05 A input - 571 lm. Non-dimming.
B12 - 12W nominal, .10 A input - 1130 lm. Dimmable (0-10V).
C09 - 9W nominal, .10 A input - 797 lm. Dimmable (0-10V).
C17 - 16W nominal, .15 A input - 1633 lm. Dimmable (0-10V).
C24 - 23W nominal, .20 A input - 2240 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH



The 1380 series is available in all Brownlee paint finishes as a standard offering.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

ORDERING INFORMATION

PROJECT:
MODEL #:
FIXTURE TYPE:

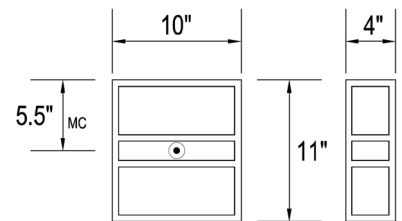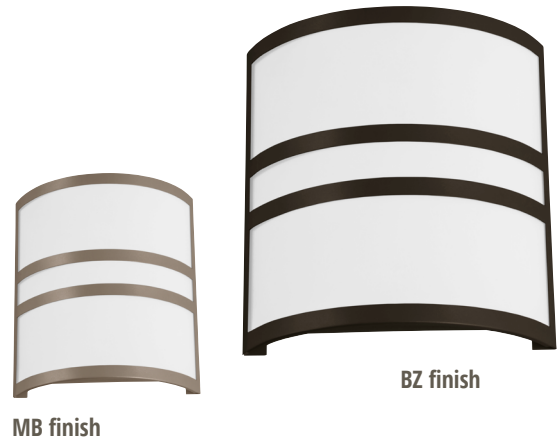

DAMP



1380

Model 2. 3. 4. 5.

2. FINISH

STANDARD

AB Antique Bronze
AS Antique Silver
BL Black
BZ Bronze
DB Desert Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NT Nickel Tone
PL Platinum
WH White

CUSTOM

Provide color sample or RAL code to match

3. WATTAGE

B06 6W B Series LED
B12 12W B Series LED
C09 9W C Series LED
C17 16W C Series LED
C24 23W C Series LED

4. COLOR TEMPERATURE

35K 3500K standard color temperature
27K 2700K color temperature
30K 3000K color temperature
40K 4000K color temperature

5. AVAILABLE OPTIONS

90R⁰ 90 CRI (3000K only)
BAC¹ Buy American Compliant
BLD^{3}** Bi-Level Dimming (All except B06)
DTR⁴ Triac (Line Voltage) Dimming (120V) (All except B06)
ES⁶ ENERGY STAR® (Not available in 90 CRI)
FCL⁷ French Canadian Labels
OCC⁸ Occupancy Sensor
T24⁹ Title 24 Compliant (B12 & C24 in 3000K only)
TBC Top/Bottom Covers (Perforated)

Notes: (0) **90R** - cannot be combined with ES or T24 (1) **BAC** - cannot be combined with FCL (2) **BBI/BBS/BBC** - cannot be combined with DTR, ECW, EXT, or T24 (3) **BLD** - cannot be combined with DTR, OCC, or T24 (4) **DTR** - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) **ECW** - cannot be combined with BBI, BBC, or DTR (6) **ES** - cannot be combined with 90R, FCL, or T24 (7) **FCL** - cannot be combined with BAC, ES, or T24 (8) **OCC** - cannot be combined with BLD (9) **T24** - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) **BBS** - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) **PCH/PC4** - cannot be combined with BLD or OCC

Add'l Notes: ***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. ****BLD** - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.



REVISED
2020.02.06