

1454

STANDARD SPECIFICATIONS

HOUSING

Assembled from formed, cold rolled steel, this simple design is a classic look that blends with any décor.

MOUNT PAN

Manufactured using cold rolled steel with a baked on, high reflectance white finish.

DIFFUSER

The front diffuser ranges from the understated look of basic white, to a selection of fabric choices, to our distinctive trio of unique styles. The side panels are constructed from quality white acrylic.

ELECTRICAL

Quad CFL, 4-pin G24q Base 2700K lamp – 120-277V Electronic HPF Ballast
 FT CFL, 4-pin 2G11 Base 3000K lamp – 120-277V Electronic HPF Ballast
 T5 Linear Fluorescent, bipin lamp (by others) – 120-277V Electronic HPF Ballast

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.


MOUNTING

The 1454 is designed to be mounted directly to a j-box (by others). The 27" version has additional holes for anchor bolts (by others) appropriate for the mounting surface.

FINISH

The 1454 series is available in all Brownlee paint finishes as a standard offering.

PROJECT:
MODEL #:
FIXTURE TYPE:

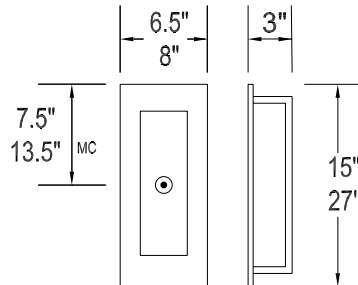

ORDERING INFORMATION

1454 - _____ - _____ - _____ - _____ - _____ - _____
 Model 2. 3. 4. 5. 6. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	6. AVAILABLE OPTIONS
15 L: 15" 27 L: 27"	STANDARD AB Antique Bronze AS Antique Silver BL Black BZ Bronze DB Desert Bronze GM Gun Metal MB Metallic Bronze MG Metallic Gold NT Nickel Tone PL Platinum WH White CUSTOM Provide color sample or RAL code to match	15 SIZE 13Q 1-13W Quad CFL, elec. HPF 213Q 2-13W Quad CFL, elec. HPF 18Q 1-18W Quad CFL, elec. HPF 26Q 1-26W Quad CFL, elec. HPF 27 SIZE 36F 1-36/39W FT CFL, elec. HPF 214L 2-14W T5, elec. HPF 224L 2-24W T5HO, elec. HPF	STANDARD WA White Acrylic OPTIONAL BMB Bamboo GDM Gold Mesh MAL Mahogany Linen NAL Natural Linen PER Pearl ROW Rolling Waves SAP Sapphire WHL White Linen	BAC Buy American Compliant DIM1 Dimming Ballast (120V) (Q only) DIM2 Dimming Ballast (277V) (Q only) ES ENERGY STAR® (26Q only) ACCESSORIES (field installed) BBR¹ Remote Battery Backup (Q only)

1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

Specifications and dimensions subject to change without notice.
 Consult your Brownlee Lighting representative for availability and ordering information.



REVISED
2018.7.26