

1456 LED

STANDARD SPECIFICATIONS

HOUSING

Assembled from formed, cold rolled steel, the straightforward nature of the half-cylinder is a timeless style that is never out of place.

MOUNT PAN

Manufactured using cold rolled steel with a baked on, high reflectance white finish.

DIFFUSER

The semi-circle diffuser can be specified in white, fabric, or one of the unique pieces to fit any room.

LED PERFORMANCE - 3500K STANDARD

120-277V, 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Standard 3500K source lumens noted. Consult Brownlee.com for performance of all CCTs.

B06 - 6W nominal, .05 A input - 700 lm - 117 lm/W. Non-dimming.
 B12 - 12W nominal, .10 A input - 1430 lm - 123 lm/W. Dimmable (0-10V).
 C09 - 9W nominal, .10 A input - 1200 lm - 144 lm/W. Dimmable (0-10V).
 C17 - 16W nominal, .15 A input - 2050 lm - 132 lm/W. Dimmable (0-10V).
 C24 - 23W nominal, .20 A input - 2950 lm - 131 lm/W. Dimmable (0-10V).
 C37 - 35W nominal, .30 A input - 4380 lm - 126 lm/W. Dimmable (0-10V).

MOUNTING

The 1456 is designed to be mounted directly to a j-box (by others). The 25" version has additional holes for anchor bolts (by others) appropriate for the mounting surface.

FINISH

The 1456 series is available in all Brownlee paint finishes as a standard offering.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


PROJECT:
MODEL #:
FIXTURE TYPE:



GM finish, WHA diffuser



MB finish, GDM diffuser

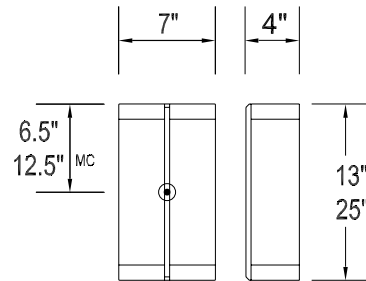

ORDERING INFORMATION

1456 - Model - 2. - 3. - 4. - 5. - 6. - 7. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	6. COLOR TEMPERATURE
13 L: 13"	STANDARD	13 SIZE	STANDARD	35K 3500K standard color temperature
25 L: 25"	AB Antique Bronze	B06 6W B Series LED	WHA White Acrylic	27K 2700K color temperature
	AS Antique Silver	B12 12W B Series LED	OPTIONAL	30K 3000K color temperature
	BL Black	C09 9W C Series LED	BMB Bamboo	40K 4000K color temperature
	BZ Bronze	C17 16W C Series LED	GDM Gold Mesh	
	DB Desert Bronze	C24 23W C Series LED	MAL Mahogany Linen	7. AVAILABLE OPTIONS
	GM Gun Metal		NAL Natural Linen	90R⁰ 90 CRI (3000K only)
	MB Metallic Bronze	25 SIZE	PER Pearl	BAC¹ Buy American Compliant
	MG Metallic Gold	C37 35W C Series LED	ROW Rolling Waves	DTR⁴ Triac (Line Voltage) Dimming (120V) (All except B06)
	NT Nickel Tone		SAP Sapphire	ES⁶ ENERGY STAR® (Not available in 90 CRI)
	PL Platinum		WHL White Linen	FCL⁷ French Canadian Labels
	WH White			T24⁹ Title 24 Compliant (B12 & C24 in 3000K only)
	CUSTOM			
	Provide color sample or RAL code to match			

Notes: (0) 90R - cannot be combined with ES or T24 (1) BAC - cannot be combined with FCL (2) BBI/BBS/BBC - cannot be combined with DTR, ECW, EXT, or T24 (3) BLD - cannot be combined with DTR, OCC, or T24 (4) DTR - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) ECW - cannot be combined with BBI, BBC, or DTR (6) ES - cannot be combined with 90R, DTR, FCL, or T24 (7) FCL - cannot be combined with BAC, ES, or T24 (8) OCC - cannot be combined with BLD (9) T24 - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) BBS - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) PCH/PC4 - cannot be combined with BLD or OCC

Add'l Notes: *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.



DAMP

