

1533

STANDARD SPECIFICATIONS

HOUSING

Formed from rugged cold rolled steel, the simple elegance of this series lends itself to any number of applications.

MOUNT PAN

Manufactured using cold rolled steel with a baked on, high reflectance white finish.

DIFFUSER

The recessed diffuser is available in a standard white acrylic, or you can choose from a selection of fabrics and distinctive patterns.

ELECTRICAL

Quad CFL, 4-pin G24q Base 2700K lamp – 120-277V Electronic HPF Ballast
 GU24 CFL, 2-prong Base 2700K lamp – 120V Electronic NPF Ballast

Brownlee Lighting does not recommend GU24 base lamps for 24 hour operation due to lamp manufacturer specifications.

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.


MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 1533 series is available in all Brownlee paint finishes as a standard offering.

PROJECT:
MODEL #:
FIXTURE TYPE:

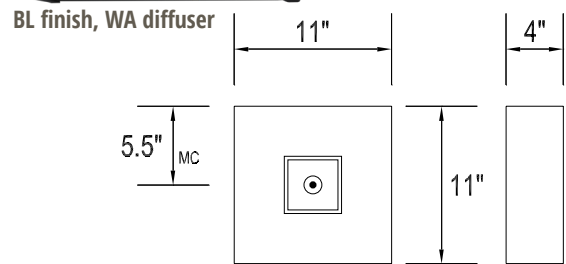

DAMP



ORDERING INFORMATION

1533 - _____
 Model 2. 3. 4. 5. (if required)

2. FINISH

STANDARD

- AB** Antique Bronze
- AS** Antique Silver
- BL** Black
- BZ** Bronze
- DB** Desert Bronze
- GM** Gun Metal
- MB** Metallic Bronze
- MG** Metallic Gold
- NT** Nickel Tone
- PL** Platinum
- WH** White

CUSTOM

Provide color sample or RAL code to match

3. WATTAGE

- 13Q** 1-13W Quad CFL, elec. HPF
- 213Q** 2-13W Quad CFL, elec. HPF
- 18Q** 1-18W Quad CFL, elec. HPF
- 218Q** 2-18W Quad CFL, elec. HPF
- 26Q** 1-26W Quad CFL, elec. HPF
- 226Q** 2-26W Quad CFL, elec. HPF

- 13G** 1-13W GU24 CFL, elec. NPF
- 213G** 2-13W GU24 CFL, elec. NPF
- 18G** 1-18W GU24 CFL, elec. NPF
- 218G** 2-18W GU24 CFL, elec. NPF

4. DIFFUSER

STANDARD

- WA** White Acrylic

OPTIONAL

- BMB** Bamboo
- GDM** Gold Mesh
- MAL** Mahogany Linen
- NAL** Natural Linen
- PER** Pearl
- ROW** Rolling Waves
- SAP** Sapphire
- WHL** White Linen

5. AVAILABLE OPTIONS

- BAC** Buy American Compliant
- DIM1** Dimming Ballast (120V) (Q only)
- DIM2** Dimming Ballast (277V) (Q only)
- ES** ENERGY STAR® (26Q & 226Q only)

ACCESSORIES (field installed)

- BBR¹** Remote Battery Backup (Q only)

1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.