

# 1535 LED

## STANDARD SPECIFICATIONS

### FRAME

Cold rolled steel, roll formed and assembled with rivets. The assembly has multiple stiffening edges for durability.

### DIFFUSER

Translucent, UV stabilized, white acrylic. The material is flexible to withstand minor impact without breaking.

### PAN

Formed, cold rolled steel design, finished with a powder coat high reflectance white paint. The pan has four standoffs, resulting in a halo of light around the wall.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
 Amperage rated @ 110V input  
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Standard 3500K source lumens noted. Consult Brownlee.com for performance of all CCTs.  
 B06 - 6W nominal, .05 A input - 700 lm - 117 lm/W. Non-dimming.  
 B12 - 12W nominal, .10 A input - 1430 lm - 123 lm/W. Dimmable (0-10V).  
 C09 - 9W nominal, .10 A input - 1200 lm - 144 lm/W. Dimmable (0-10V).  
 C17 - 16W nominal, .15 A input - 2050 lm - 132 lm/W. Dimmable (0-10V).  
 C24 - 23W nominal, .20 A input - 2950 lm - 131 lm/W. Dimmable (0-10V).

### MOUNTING

Directly to j-box (by others). Mounting hardware included.

### FINISH

The 1535 series is available in all Brownlee paint finishes as a standard offering.

### WARRANTY


5 year limited warranty on this LED product. Consult factory for details.

### ORDERING INFORMATION

PROJECT:
MODEL #:
FIXTURE TYPE:



NT finish

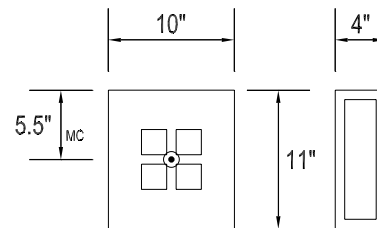

DAMP



**1535** - \_\_\_\_\_  
 Model                      2.                      3.                      4.                      5. (if required)

## 2. FINISH

### STANDARD

- AB Antique Bronze
- AS Antique Silver
- BL Black
- BZ Bronze
- DB Desert Bronze
- GM Gun Metal
- MB Metallic Bronze
- MG Metallic Gold
- NT Nickel Tone
- PL Platinum
- WH White

### CUSTOM

Provide color sample or RAL code to match

## 3. WATTAGE

- B06** 6W B Series LED
- B12** 12W B Series LED
- C09** 9W C Series LED
- C17** 16W C Series LED
- C24** 23W C Series LED

## 4. COLOR TEMPERATURE

- 35K** 3500K standard color temperature
- 27K** 2700K color temperature
- 30K** 3000K color temperature
- 40K** 4000K color temperature

## 5. AVAILABLE OPTIONS

- 90R<sup>9</sup>** 90 CRI (3000K only)
- BAC<sup>1</sup>** Buy American Compliant
- DTR<sup>4</sup>** Triac (Line Voltage) Dimming (120V)(All except B06)
- ES<sup>6</sup>** ENERGY STAR<sup>®</sup> (Not available in 90 CRI)
- FCL<sup>7</sup>** French Canadian Labels
- T24<sup>9</sup>** Title 24 Compliant (B12 & C24 in 3000K only)

**Notes:** (0) **90R** - cannot be combined with ES or T24 (1) **BAC** - cannot be combined with FCL (2) **BBI/BBS/BBC** - cannot be combined with DTR, ECW, EXT, or T24 (3) **BLD** - cannot be combined with DTR, OCC, or T24 (4) **DTR** - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) **ECW** - cannot be combined with BBI, BBC, or DTR (6) **ES** - cannot be combined with 90R, DTR, FCL, or T24 (7) **FCL** - cannot be combined with BAC, ES, or T24 (8) **OCC** - cannot be combined with BLD (9) **T24** - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) **BBS** - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) **PCH/PC4** - cannot be combined with BLD or OCC

**Add'l Notes:** \***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. \*\***BLD** - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.