

# SHADER SHALLOW

## STANDARD SPECIFICATIONS

### SHADE

The shade is constructed from traditional lampshade material with a polyethylene liner, wrapped around a steel frame. It is available in multiple materials, divided into two pricing tiers.

### TRIM

Cold rolled steel stem and canopy. The lower cover is held in place with a solid brass finial. All trim pieces available in all Brownlee finish.

### DIFFUSER

A white acrylic cover is located on the bottom of the shade with an optional cover for the top.

### HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

3500K delivered lumens noted. Consult Brownlee.com for performance of all CCTs. C49 - 45W nominal, .40 A input - 4265 lm. Dimmable (0-10V).

### MOUNTING

Directly to j-box (by others). Mounting hardware included.

### FINISH

The 2067 series is available in all Brownlee paint finishes as a standard offering.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


## ORDERING INFORMATION

**2067** - Model 2. 3. 4. 5. 6. 7. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	6. COLOR TEMPERATURE
20 20" dia.	<b>STANDARD</b>	<b>C49</b> 45W C Series LED	<b>TIER 1</b>	<b>35K</b> 3500K standard color temperature
24 24" dia.	<b>BL</b> Black		<b>SN1</b> Satin Weave - White	<b>27K</b> 2700K color temperature
	<b>BZ</b> Bronze		<b>SN2</b> Satin Weave - Ivory	<b>30K</b> 3000K color temperature
	<b>GM</b> Gun Metal			<b>40K</b> 4000K color temperature
	<b>MB</b> Metallic Bronze		<b>TIER 2</b>	
	<b>MG</b> Metallic Gold		<b>GR1</b> Grasscloth - Natural	
	<b>NT</b> Nickel Tone		<b>BK1</b> Black Linen	
	<b>PL</b> Platinum			
	<b>WH</b> White			
	<b>CUSTOM</b>			
	Provide color sample or RAL code to match			



BL finish, GR1 diffuser

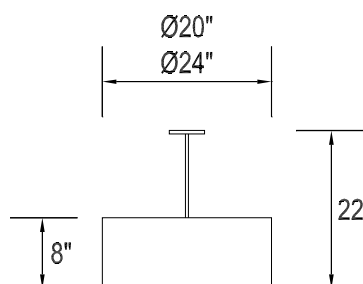

**DAMP**



### ACCESSORIES (field installed - order separately)

**390002xx** SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)  
**210002WHA** Top Cover Set: 20 size, White Acrylic  
**210003WHA** Top Cover Set: 24 size, White Acrylic

**Notes:** (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** \*BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. \*\*BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.