

2067 LED

STANDARD SPECIFICATIONS

SHADE

The shade is constructed from traditional lampshade material with a polyethylene liner, wrapped around a steel frame. It is available in multiple materials, divided into two pricing tiers.

TRIM

Cold rolled steel stem and canopy. The lower cover is held in place with a solid brass finial. All trim pieces available in all Brownlee finish.

DIFFUSER

A white acrylic cover is located on the bottom of the shade with an optional cover for the top.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

3500K delivered lumens noted. Consult Brownlee.com for performance of all CCTs.
 C49 - 45W nominal, .40 A input - 4265 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 2067 series is available in all Brownlee paint finishes as a standard offering.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:



BL finish, GR1 diffuser

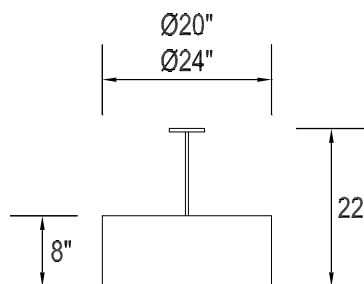

DAMP



ORDERING INFORMATION

2067	-	-	-	-	-	-	-
Model	2.	3.	4.	5.	6.	7. (if required)	

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	6. COLOR TEMPERATURE
20 20" dia.	STANDARD	C49 45W C Series LED	TIER 1	35K 3500K standard color temperature
24 24" dia.	BL Black		SN1 Satin Weave - White	27K 2700K color temperature
	BZ Bronze		SN2 Satin Weave - Ivory	30K 3000K color temperature
	GM Gun Metal		TIER 2	40K 4000K color temperature
	MB Metallic Bronze		GR1 Grasscloth - Natural	
	MG Metallic Gold		BK1 Black Linen	
	NT Nickel Tone			
	PL Platinum			
	WH White			
	CUSTOM			
	Provide color sample or RAL code to match			
7. AVAILABLE OPTIONS				
	90R⁹ 90 CRI (3000K only)			
	BAC¹ Buy American Compliant			
	DTR⁴ Triac (Line Voltage) Dimming (120V)			
	ES⁶ ENERGY STAR [®] (Not available in 90 CRI)			
	FCL⁷ French Canadian Labels			
	SVL Swivel Canopy / Slope Ceiling			
	T24⁹ Title 24 Compliant (3000K only)			

ACCESSORIES (field installed - order separately)

390002xx	SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
210002WHA	Top Cover Set: 20 size, White Acrylic
210003WHA	Top Cover Set: 24 size, White Acrylic

Notes: (0) **90R** - cannot be combined with ES or T24 (1) **BAC** - cannot be combined with FCL (2) **BBI/BBS/BBC** - cannot be combined with DTR, ECW, EXT, or T24 (3) **BLD** - cannot be combined with DTR, OCC, or T24 (4) **DTR** - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) **ECW** - cannot be combined with BBI, BBC, or DTR (6) **ES** - cannot be combined with 90R, FCL, or T24 (7) **FCL** - cannot be combined with BAC, ES, or T24 (8) **OCC** - cannot be combined with BLD (9) **T24** - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) **BBS** - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) **PCH/PC4** - cannot be combined with BLD or OCC

Add'l Notes: ***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. ****BLD** - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.



REVISED
2020.04.20