

# 2322 LED

## STANDARD SPECIFICATIONS

### PAN

Cold rolled steel, formed in a die, finished with an electroplated brushed nickel coating that will withstand most nicks and scratches.

### DIFFUSER

Translucent, UV stabilized white acrylic. The drum shape features a fabric material bonded to the walls, allowing for ease of cleaning with a dry or damp cloth. You can choose from a selection of fabrics.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
 Amperage rated @ 110V input  
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B12 - 12W nominal, .10 A input - 1547 lm. Dimmable (0-10V).  
 C17 - 16W nominal, .15 A input - 2235 lm. Dimmable (0-10V).  
 C24 - 23W nominal, .20 A input - 3066 lm. Dimmable (0-10V).

### MOUNTING

The 2322 is designed to be mounted directly to a j-box (by others). Mounting hardware included.

### FINISH

The standard finish is a sturdy electroplated brushed nickel. Options include all Brownlee paint finishes. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.


### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

<b>PROJECT:</b>
<b>MODEL #:</b>
<b>FIXTURE TYPE:</b>



NT finish, GYL diffuser

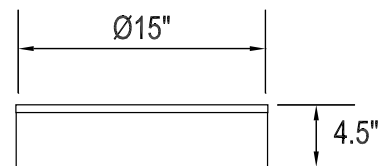

**DAMP**



## ORDERING INFORMATION

**2322** - Model - 2. - 3. - 4. - 5. - 6. (if required)

### 2. FINISH

- STANDARD**
- BN** Brushed Nickel
- OPTIONAL**
- BL** Black  
**BZ** Bronze  
**GM** Gun Metal  
**MB** Metallic Bronze  
**MG** Metallic Gold  
**NT** Nickel Tone  
**PL** Platinum  
**WH** White

**CUSTOM**  
 Provide color sample or RAL code to match

### 3. WATTAGE

- B12** 12W B Series LED  
**C17** 16W C Series LED  
**C24** 23W C Series LED

### 4. DIFFUSER

- WHA** White Acrylic  
**GYL** Grey Linen  
**NAL** Natural Linen  
**WBK** Woven Black  
**WHL** White Linen

Note: MAL & ROW - have been discontinued on this model - contact factory for availability.

### 5. COLOR TEMPERATURE

- 35K** 3500K standard color temperature  
**27K** 2700K color temperature  
**30K** 3000K color temperature  
**40K** 4000K color temperature

### 6. AVAILABLE OPTIONS

- 90R<sup>0</sup>** 90 CRI (3000K only)  
**BAC<sup>1</sup>** Buy American Compliant  
**BLD<sup>3\*\*</sup>** Bi-Level Dimming  
**DTR<sup>4</sup>** Triac (Line Voltage) Dimming (120V)  
**ES<sup>6</sup>** ENERGY STAR® (Not available in 90 CRI)  
**FCL<sup>7</sup>** French Canadian Labels  
**OCC<sup>8</sup>** Occupancy Sensor  
**T24<sup>9</sup>** Title 24 Compliant (B12 & C24 in 3000K only)

**Notes:** (0) 90R - cannot be combined with ES or T24 (1) BAC - cannot be combined with FCL (2) BBI/BBS/BBC - cannot be combined with DTR, ECW, EXT, or T24 (3) BLD - cannot be combined with DTR, OCC, or T24 (4) DTR - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) ECW - cannot be combined with BBI, BBC, or DTR (6) ES - cannot be combined with 90R, FCL, or T24 (7) FCL - cannot be combined with BAC, ES, or T24 (8) OCC - cannot be combined with BLD (9) T24 - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) BBS - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) PCH/PC4 - cannot be combined with BLD or OCC

**Add'l Notes:** \*BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. \*\*BLD - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.