

2342

STANDARD SPECIFICATIONS

PAN

Cold rolled 22 GA steel, formed in a die, finished in a powder coat high reflectance white paint. The pan features weld nuts for a "twist and seat" installation of the diffuser.

DIFFUSER

Translucent, UV stabilized white acrylic. The two tier drum shape features a twist on the classic lampshade look. The material is bonded to walls of the drum, and is available in multiple styles.

ELECTRICAL

Quad CFL, 4-pin G24q Base 2700K lamp - 120-277V Electronic HPF Ballast
 GU24 CFL, 2-prong Base 2700K lamp - 120V Electronic NPF Ballast
 Circline, G10Q Base 4000K lamp - 120V Electronic NPF Ballast

Brownlee Lighting does not recommend GU24 base lamps for 24 hour operation due to lamp manufacturer specifications.

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

MOUNTING

Directly to j-box (by others). Mounting hardware included.


ORDERING

The 2342 series has a minimum 6 week delivery. Consult factory for minimum order quantity and setup fees.

PROJECT:
MODEL #:
FIXTURE TYPE:



WHL diffuser

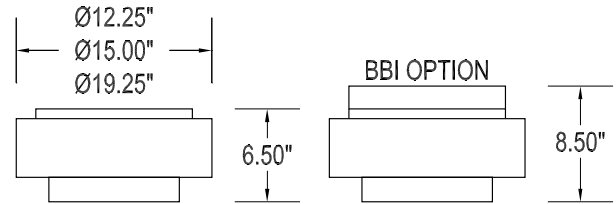

DRY

ORDERING INFORMATION

2342

Model 2. 3. 4. 5. (if required)

2. SIZE

- 13 12.25" dia.
- 15 15" dia.
- 20 19.25" dia.

3. WATTAGE

- 13 SIZE**
- 13Q 1-13W Quad CFL, elec. HPF
 - 213Q 2-13W Quad CFL, elec. HPF
 - 18Q 1-18W Quad CFL, elec. HPF
 - 26Q 1-26W Quad CFL, elec. HPF
- 13G** 1-13W GU24 CFL, elec. NPF
- 213G 2-13W GU24 CFL, elec. NPF
 - 18G 1-18W GU24 CFL, elec. NPF
 - 218G 2-18W GU24 CFL, elec. NPF
- 22C** 1-22W Circline, elec. NPF
- 15 SIZE**
- 213Q 2-13W Quad CFL, elec. HPF
 - 313Q 3-13W Quad CFL, elec. HPF
 - 18Q 1-18W Quad CFL, elec. HPF
 - 218Q 2-18W Quad CFL, elec. HPF
 - 26Q 1-26W Quad CFL, elec. HPF
 - 226Q 2-26W Quad CFL, elec. HPF
- 213G** 2-13W GU24 CFL, elec. NPF
- 313G 3-13W GU24 CFL, elec. NPF
 - 18G 1-18W GU24 CFL, elec. NPF
 - 218G 2-18W GU24 CFL, elec. NPF
- 22C** 1-22W Circline, elec. NPF
- 32C 1-32W Circline, elec. NPF
 - 54C 1-32W & 1-22W Circline, elec. NPF
- 20 SIZE**
- 413Q 4-13W Quad CFL, elec. HPF
 - 318Q 3-18W Quad CFL, elec. HPF
 - 226Q 2-26W Quad CFL, elec. HPF
 - 326Q 3-26W Quad CFL, elec. HPF
- 413G** 4-13W GU24 CFL, elec. NPF
- 318G 3-18W GU24 CFL, elec. NPF

4. DIFFUSER

- MAL Mahogany Linen
- NAL Natural Linen
- ROW Rolling Waves
- WHL White Linen

5. AVAILABLE OPTIONS

- BAC Buy American Compliant
- BB1¹ Integral Battery Backup (Q only, 15 & 20 size only, adds 2" to depth)
- DIM1 Dimming Ballast (120V) (Q only)
- DIM2 Dimming Ballast (277V) (Q only)
- ES ENERGY STAR® (26Q, 226Q & 326Q only)

1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.