

# 2600 LED

## STANDARD SPECIFICATIONS

### DIFFUSER

The drum features a high quality UV stabilized white acrylic outer shell, with your choice of fabric bonded to its exterior sidewall. The base (bottom) of the drum is constructed with high transmission white acrylic. The fixture can be cleaned with a damp cloth and mild detergent if needed. See accessories section for Top Cover Set.

### HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
Amperage rated @ 110V input  
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F  
Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

#### 15" Size

B12 - 12W nominal, .10 A input - 1532 lm. Dimmable (0-10V).  
C17 - 16W nominal, .15 A input - 2250 lm. Dimmable (0-10V).  
C24 - 23W nominal, .20 A input - 3087 lm. Dimmable (0-10V).

#### 20" Size

C24 - 23W nominal, .20 A input - 3087 lm. Dimmable (0-10V).  
C37 - 35W nominal, .30 A input - 4548 lm. Dimmable (0-10V).  
C49 - 45W nominal, .40 A input - 5878 lm. Dimmable (0-10V).

#### 24", 30", & 36" Size

C37 - 35W nominal, .30 A input - 4548 lm. Dimmable (0-10V).  
C49 - 45W nominal, .40 A input - 5878 lm. Dimmable (0-10V).  
H63 - 63W nominal, .53 A input - 7619 lm. Dimmable (0-10V).

#### 36" & 48" Size

H63 - 63W nominal, .53 A input - 7619 lm. Dimmable (0-10V).

### MOUNTING

Directly to j-box (by others). Mounting hardware included.

### SUSPENSION SYSTEM

The 2600 Series is available in multiple colors and four suspension methods:

**CC1 - Cord & Single Cable:** Both the power cord and aircraft cable can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops. Recommended for pendants up to 36"Ø only.

**CC3 - Cord & Three Cable:** Both the power cord and aircraft cables can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops.

**SCM - Stem & Cable Mount:** Steel stem in your choice of finish with three aircraft cables. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section.

**SSM - Single Stem Mount:** Traditional pendant style. Steel stem in your choice of finish. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section. Recommended for pendants up to 36"Ø only.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:




Acrylic-Backed Fabric Diffuser Options




**Specifications and dimensions subject to change without notice.**

Consult your Brownlee Lighting representative for availability and ordering information.


## DIMENSIONAL DRAWING

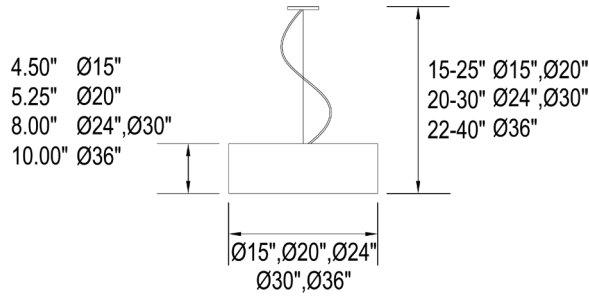


CC1 suspension

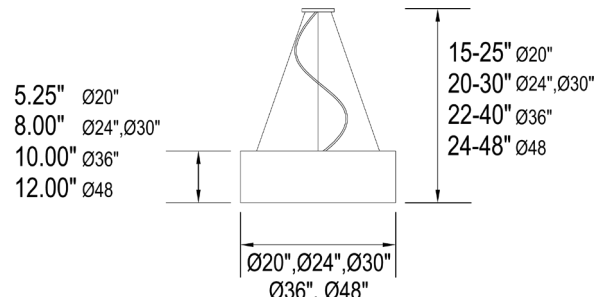

CC3 suspension

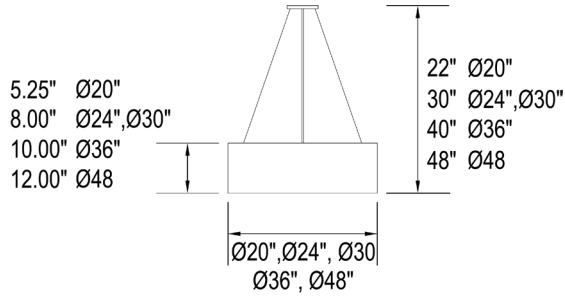

SCM suspension

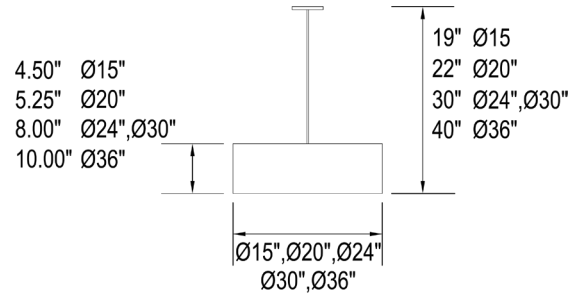

SSM suspension



## ORDERING INFORMATION

2600

Model 2. 3. 4. 5. 6. 7. 8. (if required)

### 2. SIZE

15 15" dia.  
20 19.25" dia.  
24 24" dia.  
30 30" dia.  
36 36" dia.  
48 48" dia.

\*NOTE: 42" Size - has been discontinued on this model - contact factory for availability.

### 3. FINISH

#### CC1 & CC3

BL Black  
NT Nickel Tone  
WH White

#### SCM & SSM

BL Black  
BZ Bronze  
GM Gun Metal  
MB Metallic Bronze  
MG Metallic Gold  
NT Nickel Tone  
PL Platinum  
WH White

### 4. WATTAGE

**15 SIZE**  
B12 12W B Series LED

**C17** 16W C Series LED  
**C24** 23W C Series LED

**20 SIZE**  
C24 23W C Series LED  
C37 35W C Series LED  
C49 45W C Series LED

**24, 30 & 36 SIZE**  
C37 35W C Series LED  
C49 45W C Series LED

**36 & 48 SIZE**  
H63 63W H Series LED

### 5. DIFFUSER

WHA White Acrylic  
GYL Grey Linen  
NAL Natural Linen  
WBK Woven Black  
WHL White Linen

\*NOTE: MAL & ROW have been discontinued on this model - contact factory for availability.

### 6. SUSPENSION

CC1 Cord & Single Cable (All except 48 size)  
CC3 Cord & Three Cable Stem & Cable Mount  
SCM Single Stem Mount (All except 48 size)  
SSM Single Stem Mount (All except 48 size)

### 7. COLOR TEMPERATURE

35K 3500K color temperature  
27K 2700K color temperature (All except H63)  
30K 3000K color temperature  
40K 4000K color temperature

### 8. AVAILABLE OPTIONS

90R<sup>0</sup> 90 CRI (3000K only)  
BAC<sup>1</sup> Buy American Compliant  
CE1 3' - 10' Cord/Cable Extension (CC1 & CC3 only)  
CE2 10' - 20' Cord/Cable Extension (CC1 & CC3 only)  
DTR<sup>4</sup> Triac (Line Voltage) Dimming (120V)  
ES<sup>6</sup> ENERGY STAR<sup>®</sup> (Not available in 90 CRI)  
FCL<sup>7</sup> French Canadian Labels  
T24<sup>9</sup> Title 24 Compliant (B12, C24 & C49 in 3000K only)

### ACCESSORIES (field installed - order separately)

390001xx SCM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)  
390002xx SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)  
320029WHA Top Cover Set: 24 size, White Acrylic  
320030WHA Top Cover Set: 30 size, White Acrylic  
320031WHA Top Cover Set: 36 size, White Acrylic  
320033WHA Top Cover Set: 48 size, White Acrylic

Notes: (0) 90R - cannot be combined with ES or T24 (1) BAC - cannot be combined with FCL (2) BBI/BBS/BBC - cannot be combined with DTR, ECW, EXT, or T24 (3) BLD - cannot be combined with DTR, OCC, or T24 (4) DTR - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) ECW - cannot be combined with BBI, BBC, or DTR (6) ES - cannot be combined with 90R, FCL, or T24 (7) FCL - cannot be combined with BAC, ES, or T24 (8) OCC - cannot be combined with BLD (9) T24 - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) BBS - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) PCH/PC4 - cannot be combined with BLD or OCC

Add'l Notes: \*BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of 20C/-4F. \*\*BLD - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.