

# 5057 LED

## STANDARD SPECIFICATIONS

### HOUSING

Cold rolled steel, die-formed, welded assembly. The housing can be mounted horizontal or vertical.

### DIFFUSER

UV stabilized white acrylic. Diffuser is molded in the classic puff design. The material can withstand minor impact without breaking.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
Source lumens noted. Amperage rated @ 110V input  
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

H16 - 16W nominal, .14 A input - 2076 lm - 126 lm/W. Dimmable (0-10V).  
H25 - 25W nominal, .20 A input - 3200 lm - 132 lm/W. Dimmable (0-10V).  
H32 - 32W nominal, .26 A input - 4119 lm - 130 lm/W. Dimmable (0-10V).


### MOUNTING

Fixture uses wall anchors (by others) appropriate for the mounting surface.

### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:

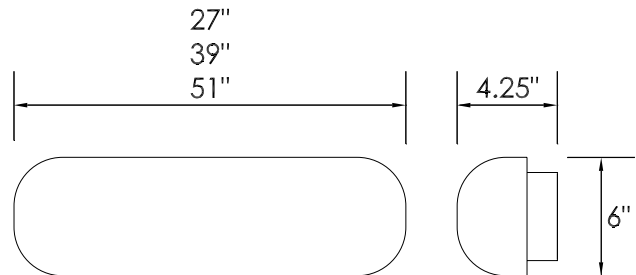

DAMP



## ORDERING INFORMATION

**5057** - Model - 2. - 3. - 4. - 5. (if required)

### 2. SIZE

**27** L: 27"  
**39** L: 39"  
**51** L: 51"

### 3. WATTAGE

**27 SIZE**  
**H16** 16W H Series LED  
**39 SIZE**  
**H25** 25W H Series LED  
**51 SIZE**  
**H32** 32W H Series LED

### 4. COLOR TEMPERATURE

**35K** 3500K standard color temperature  
**30K** 3000K color temperature  
**40K** 4000K color temperature

### 5. AVAILABLE OPTIONS

**90R<sup>0</sup>** 90 CRI (3000K only)  
**BAC<sup>1</sup>** Buy American Compliant  
**BBI<sup>2\*</sup>** Integral Battery Backup (H25 & H32 only)  
**DTR<sup>4</sup>** Triac (Line Voltage) Dimming (120V)  
**ES<sup>6</sup>** ENERGY STAR® (Not available in 90 CRI)  
**FCL<sup>7</sup>** French Canadian Labels

**Notes:** (0) **90R** - cannot be combined with ES or T24 (1) **BAC** - cannot be combined with FCL (2) **BBI/BBS/BBC** - cannot be combined with DTR, ECW, EXT, or T24 (3) **BLD** - cannot be combined with DTR, OCC, or T24 (4) **DTR** - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) **ECW** - cannot be combined with BBI, BBC, or DTR (6) **ES** - cannot be combined with 90R, DTR, FCL, or T24 (7) **FCL** - cannot be combined with BAC, ES, or T24 (8) **OCC** - cannot be combined with BLD (9) **T24** - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) **BBS** - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) **PCH/PC4** cannot be combined with BLD or OCC

**Add'l Notes:** \***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. \*\***BLD** - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

