5060

PROJECT:	
MODEL #:	
FIXTURE TYPE:	

STANDARD SPECIFICATIONS

HOUSING
Cold rolled steel, die-formed and assembled with hardware and welds, and can be mounted horizontally or vertically. The end caps and the front baffle are die-formed, and secure the diffuser to the housing with nuts.

DIFFUSER
Translucent UV stabilized clear prismatic acrylic. The extruded diffuser slips into a designed track to ensure it stays in position, and the material can withstand minor impact without breaking.

ELECTRICAL
T8 Linear Fluorescent, bipin lamp (by others) – 120-277V Electronic HPF Ballast

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

MOUNTING
Fixture uses wall anchors (by others) appropriate for the mounting surface.

FINISH
The 5060 series housing is finished in a plated white finish. Plated finishes are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

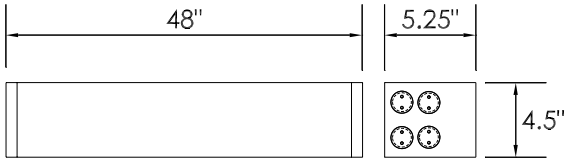

DAMP

ORDERING INFORMATION

5060 - _____ - _____
Model | 2. | 3. (if required)

2. WATTAGE

232L	2-32W T8, elec. HPF
332L	3-32W T8, elec. HPF
432L	4-32W T8, elec. HPF

3. AVAILABLE OPTIONS

BAC	Buy American Compliant
BBI[1]	Integral Battery Backup (232L only)
BBIC[1]	Integral Battery Backup, Cold Weather (232L only)
CO	Convenience Outlet (120V)
PC	Pull Chain: On, Off (120V)
PC4	4 Position Pull Chain: Uplight & Downlight, Uplight Only, Downlight Only, Off (232L only) (120V)

1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

Specifications and dimensions subject to change without notice.
Consult your Brownlee Lighting representative for availability and ordering information.

BROWNLEE LIGHTING
www.brownlee.com

REVISED
2017.1.17