

7604

STANDARD SPECIFICATIONS

FRAME

Heavy duty aluminum with roll formed aluminum bands. The optional trim bars are solid 0.250" thick aluminum, held in place by fasteners.

DIFFUSER

Translucent, UV stabilized, white acrylic. Diffuser is form molded allowing for a uniform standard thickness of 0.100" throughout.

PAN

Heavy duty formed aluminum, featuring aluminum thread inserts to prevent rusting of fasteners.

ELECTRICAL

Quad CFL, 4-pin G24q Base 2700K lamp - 120-277V Electronic HPF Ballast
 Triple CFL, 4-pin GX24Q Base 2700K lamp - 120-277V Electronic HPF Ballast
 FT CFL, 4-pin 2G11 Base 3000K lamp - 120-277V Electronic HPF Ballast

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.


MOUNTING

The 7604 series is designed to be mounted directly to the wall with (4) 1/4" anchors (not included).

FINISH

All 7604 parts are prepared using a three step pre-treatment/sealing process, followed by a powder coat primer prior to applying any of the Brownlee paint finishes.

PROJECT:
MODEL #:
FIXTURE TYPE:

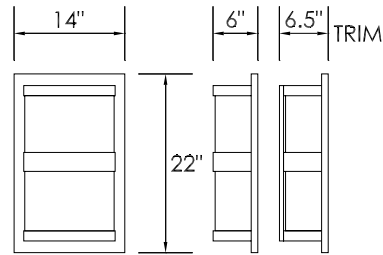

NT finish, VB0 trim



PL finish, VB1 trim



PL finish, VB2 trim



BZ finish, VB3 trim



ORDERING INFORMATION

7604 - _____ - _____ - _____ - _____ - _____
 Model 2. 3. 4. 5. (if required)

2. FINISH

STANDARD

- AB** Antique Bronze
- AS** Antique Silver
- BL** Black
- BZ** Bronze
- DB** Desert Bronze
- GM** Gun Metal
- MB** Metallic Bronze
- NT** Nickel Tone
- PL** Platinum
- WH** White

CUSTOM

Provide color sample or RAL code to match

3. WATTAGE

- 226Q** 2-26W Quad CFL, elec. HPF
- 232T** 2-32W Triple CFL, elec. HPF
- 242T** 2-42W Triple CFL, elec. HPF
- 236F** 2-36/39W FT CFL, elec. HPF

4. TRIM

- VB0** No trim
- VB1** 1 vertical bar
- VB2** 2 vertical bars
- VB3** 3 vertical bars

5. AVAILABLE OPTIONS

- BAC** Buy American Compliant
- ES** ENERGY STAR® (Q only)

ACCESSORIES (field installed)

- BBR¹** Remote Battery Backup (Q & T only)
- BBRC¹** Remote Battery Backup, Cold Weather (Q & T only)

1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.