

7704

STANDARD SPECIFICATIONS

TRIM

UV stabilized polycarbonate, injection molded one piece trim, with uniform 0.125" thickness. The color is molded throughout and the stainless steel hardware is captured in place.

DIFFUSER

UV stabilized polycarbonate, injection molded in a frosted 0.125" thick prismatic diffuser. Optional diffuser available in white polycarbonate.

HOUSING

Die-cast, one piece marine grade aluminum available in two depths. 6" deep housing has threaded conduit on four sides.

ELECTRICAL

Quad CFL, 4-pin G24q Base 2700K lamp – 120-277V Electronic HPF Ballast
Triple CFL, 4-pin GX24Q Base 2700K lamp – 120-277V Electronic HPF Ballast

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

MOUNTING

Directly to j-box (by others). Mounting hardware included. The 6" version can be anchored to the surface for conduit entry.


FINISH

Brownlee offers four standard finishes.

PROJECT:
MODEL #:
FIXTURE TYPE:



BL finish

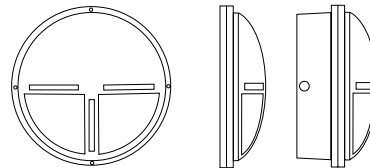

WET



ORDERING INFORMATION

7704 - - - - -
Model 2. 3. 4. 5. (if required)

2. SIZE

4 4" depth
6 6.5" depth*

*6.5" depth does not meet ADA requirements.

3. FINISH

BL Black
BZ Bronze
TI Titanium
WH White

4. WATTAGE

4 SIZE

213Q 2-13W Quad CFL, elec. HPF
18Q 1-18W Quad CFL, elec. HPF
218Q 2-18W Quad CFL, elec. HPF
26Q 1-26W Quad CFL, elec. HPF
226Q 2-26W Quad CFL, elec. HPF

32T 1-32W Triple CFL, elec. HPF
42T 1-42W Triple CFL, elec. HPF

6 SIZE

213Q 2-13W Quad CFL, elec. HPF
18Q 1-18W Quad CFL, elec. HPF
218Q 2-18W Quad CFL, elec. HPF
26Q 1-26W Quad CFL, elec. HPF
226Q 2-26W Quad CFL, elec. HPF

32T 1-32W Triple CFL, elec. HPF
232T 2032W Triple CFL, elec. HPF
42T 1-42W Triple CFL, elec. HPF
242T 2-42W Triple CFL, elec. HPF

5. AVAILABLE OPTIONS

BAC Buy American Compliant
BB1¹ Integral Battery Backup (Q & T only, 6 size only)
ES ENERGY STAR® (26Q & 226Q only)
PO1 Photo Control (120V) (6 size only)
PO2 Photo Control (208V, 240V, 277V) (6 size only)
T Tamper Resistant Hardware and Tool
WP White Polycarbonate Diffuser

1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

