



Woven Black (WBK) diffuser



White Acrylic (WHA) diffuser

## 2326 LED

Since it's not quite a donut, we've nicknamed this series the "fauxnut."

The one-piece 2326 is constructed of a matte white acrylic outer shell with a flat, inset diffuser opening. Available in a matte white acrylic or woven black fabric diffuser with an array of controls and other options to choose from such as Bi-Level Dimming (High/Low), Integral Battery Backup and more.

Refer to model 2616 for a suspended version of this product.

# FAUXNUT

## STANDARD SPECIFICATIONS

### PAN

Cold rolled 22 GA steel, formed in a die, finished in a powder coat high reflectance white paint. The pan features weld nuts for a "twist and hold" installation of the diffuser.

### DIFFUSER

The drum features a high quality UV stabilized white acrylic outer shell. The base (bottom) of the drum features an inset section and is constructed with high transmission white acrylic. The fixture can be cleaned with a damp cloth and mild detergent if needed.

### LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
Amperage rated @ 110V input  
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B12 - 12W nominal, .10 A input - 1583 lm. Dimmable (0-10V).  
C17 - 16W nominal, .15 A input - 2287 lm. Dimmable (0-10V).  
C24 - 23W nominal, .20 A input - 3138 lm. Dimmable (0-10V).  
C37 - 35W nominal, .30 A input - 4657 lm. Dimmable (0-10V).  
C49 - 45W nominal, .40 A input - 6276 lm. Dimmable (0-10V).

### MOUNTING

Directly to j-box (by others). Mounting hardware included.


### WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

<b>PROJECT:</b>
<b>MODEL #:</b>
<b>FIXTURE TYPE:</b>



WHA diffuser

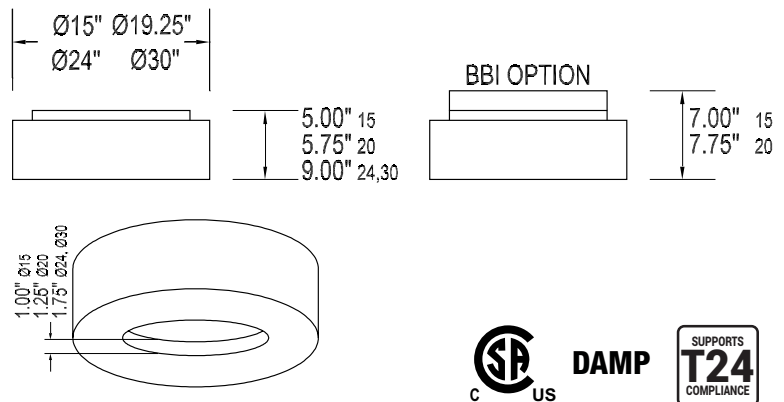

## ORDERING INFORMATION

**2326** -          -          -          -          -          -          -           
Model                      2.                      3.                      4.                      5.                      6. (if required)

2. SIZE	3. WATTAGE	4. DIFFUSER	5. COLOR TEMPERATURE	6. AVAILABLE OPTIONS
15 15" dia.	<b>15 SIZE</b>	<b>WHA</b> White Acrylic	<b>35K</b> 3500K standard color temperature	<b>90R<sup>0</sup></b> 90 CRI (3000K only)
20 19.25" dia.	<b>B12</b> 12W B Series LED	<b>WBK</b> Woven Black	<b>27K</b> 2700K color temperature	<b>BAC<sup>1</sup></b> Buy American Compliant
24 24" dia.	<b>C17</b> 16W C Series LED		<b>30K</b> 3000K color temperature	<b>BBI<sup>2*</sup></b> Integral Battery Backup (Adds 2" to depth) (15 & 20 sizes only)
30 30" dia.	<b>C24</b> 23W C Series LED		<b>40K</b> 4000K color temperature	<b>BLD<sup>3**</sup></b> Bi-Level Dimming
	<b>20, 24 &amp; 30 SIZE</b>			<b>DTR<sup>4</sup></b> Triac (Line Voltage) Dimming (120V)
	<b>C24</b> 23W C Series LED			<b>ES<sup>6</sup></b> ENERGY STAR® (Not available in 90 CRI)
	<b>C37</b> 35W C Series LED			<b>EXT</b> Extended Housing (Intended to match BBI aesthetic) (Adds 2" to depth) (15 & 20 sizes only)
	<b>C49</b> 45W C Series LED			<b>FCL<sup>7</sup></b> French Canadian Labels
				<b>OCC<sup>8</sup></b> Occupancy Sensor
				<b>T24<sup>9</sup></b> Title 24 JA8 Compliant (B12, C24 & C49 in 3000K only)

**Notes:** (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC.  
**Add'l Notes:** \*BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. \*\*BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.