



Nickel Tone (NT) trim finish



Chestnut Brown (BW) trim finish

2341 LED

The 2341 features a matte-white acrylic drum with a modern crossbar constructed of real oak wood. The crossbar is offered in your choice of a clear coated Natural finish and a variety of our standard painted finishes.

Perfect for commercial and residential corridors, units, common areas and more. Refer to model 2601 for a suspended version of this product.

TRIM FINISHES



CROSSBAR

STANDARD SPECIFICATIONS

PAN

Cold rolled 22 GA steel, formed in a die, finished in a powder coat high reflectance white paint. The pan features weld nuts for a "twist and hold" installation of the diffuser.

DIFFUSER

The drum features a high quality UV stabilized white acrylic outer shell. The base (bottom) of the drum is constructed with high transmission white acrylic. The trim is constructed from 5/8" square solid oak and is available in natural wood or select painted finishes. The fixture can be cleaned with a damp cloth and mild detergent if needed.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B12 - 12W nominal, .10 A input - 1532 lm. Dimmable (0-10V).

C17 - 16W nominal, .15 A input - 2214 lm. Dimmable (0-10V).

C24 - 23W nominal, .20 A input - 3037 lm. Dimmable (0-10V).

C37 - 35W nominal, .30 A input - 4548 lm. Dimmable (0-10V).

C49 - 45W nominal, .40 A input - 5878 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


PROJECT:

MODEL #:


FIXTURE TYPE:



NT finish



NL finish

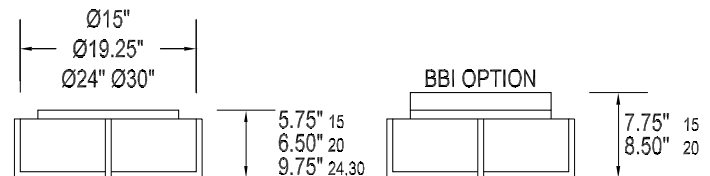

DAMP



ORDERING INFORMATION

2341 - Model - 2. - 3. - 4. - 5. - 6. (if required)

2. SIZE

15 15" dia.
20 19.25" dia.
24 24" dia.
30 30" dia.

3. TRIM FINISH

BL Black
BZ Bronze
BW Chestnut Brown
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NL Natural Wood
NT Nickel Tone
PL Platinum
WH White

4. WATTAGE

15 SIZE
B12 12W B Series LED
C17 16W C Series LED
C24 23W C Series LED
20, 24 & 30 SIZE
C24 23W C Series LED
C37 35W C Series LED
C49 45W C Series LED

5. COLOR TEMPERATURE

35K 3500K standard color temperature
27K 2700K color temperature
30K 3000K color temperature
40K 4000K color temperature

6. AVAILABLE OPTIONS

90R⁰ 90 CRI (3000K only)
BAC¹ Buy American Compliant
BBI^{2*} Integral Battery Backup (Adds 2" to depth, 15 & 20 sizes only)
BLD^{3}** Bi-Level Dimming
DTR⁴ Triac (Line Voltage) Dimming (120V)
ES⁵ ENERGY STAR® (Not available in 90 CRI)
EXT Extended Housing (Intended to match BBI aesthetic) (Adds 2" to depth) (15 & 20 sizes only)
FCL⁷ French Canadian Labels
OCC⁸ Occupancy Sensor
T24⁹ Title 24 JA8 Compliant (B12, C24 & C49 in 3000K only)

Notes: (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC.
Add'l Notes: *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.