



2362-WHA



2362-BMB

2362 LED

The 2362 LED is a sustainable solution for a variety of decorative lighting applications. The frosted matte acrylic drum is offered in a variety of vibrant colors and patterns which are bonded to the inner side of the shade for added protection and durability. The base (bottom) of the drum is constructed of high transmission white acrylic. The result is a high performance surface mount luminaire that can be cleaned with ease. Custom colors available to match your school, corporate brand, etc. Refer to the 2612 LED for a suspended version of this product.

HIGHLIGHTER

STANDARD SPECIFICATIONS

DIFFUSER

The UV stabilized designer drum is offered in a variety of vibrant colors and patterns which are bonded to the inner side of the frosted acrylic drum for added protection and durability. The base (bottom) of the drum is constructed with high transmission white acrylic. Lightly brushed chrome trim at the top and bottom of the sidewall. The fixture can be cleaned with a damp cloth.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance white powder coat.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

C24 - 23W nominal, .20 A input - 3066 lm. Dimmable (0-10V).

C37 - 35W nominal, .30 A input - 4550 lm. Dimmable (0-10V).

C49 - 45W nominal, .40 A input - 5877 lm. Dimmable (0-10V).

H63 - 63W nominal, .53 A input - 7617 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


PROJECT:

MODEL #:

FIXTURE TYPE:



WHA diffuser

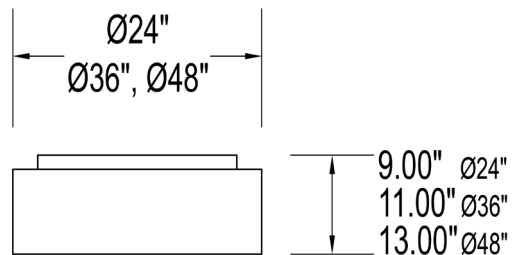

Diffuser Insert Options
(bonded to inner side of frosted acrylic drum)



ORDERING INFORMATION

2362 - - - - -					
Model	2.	3.	4.	5.	6. (if required)
2. SIZE	3. WATTAGE	4. DIFFUSER	5. COLOR TEMPERATURE	6. AVAILABLE OPTIONS	
24 24" dia.	24 SIZE	WHA White Acrylic	35K 3500K color temperature	90R ⁰ 90 CRI (3000K only)	
36 36" dia.	C24 23W C Series LED	BLU Blue	27K 2700K color temperature	BAC ¹ Buy American Compliant	
48 48" dia.	C37 35W C Series LED	BMB Bamboo	(All except H63)	BLD ^{3**} Bi-Level Dimming	
	C49 45W C Series LED	LMG Lime Green	30K 3000K color temperature	DTR ⁴ Triac (Line Voltage) Dimming (120V)	
	36 SIZE	LRD Light Red	40K 4000K color temperature	ES ⁶ ENERGY STAR [®] (Not available in 90 CRI)	
	C37 35W C Series LED	ORN Orange		FCL ⁷ French Canadian Labels	
	C49 45W C Series LED			OCC ⁸ Occupancy Sensor	
	H63 63W H Series LED				
	48 SIZE				
	H63 63W H Series LED				

*NOTE: 30" & 42" sizes have been discontinued on this model - contact factory for availability.

Notes: (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC. Add'l Notes: *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.



REVISED
2021.12.21