



Nickel Tone (NT) trim finish




Chestnut Brown (BW) trim finish

2601 LED

The 2601 features a matte-white acrylic drum with a modern crossbar constructed of real oak wood. The crossbar is offered in your choice of a clear coated Natural finish and a variety of our standard painted finishes.

Perfect for common areas, offices, conference rooms, libraries, lobbies, corridors and more. Refer to model 2341 for a flush mount version of this product.

TRIM FINISHES



CROSSBAR

STANDARD SPECIFICATIONS

DIFFUSER

The drum features a high quality UV stabilized white acrylic outer shell. The base (bottom) of the drum is constructed with high transmission white acrylic. The trim is constructed from 5/8" square solid oak and is available in natural wood or select painted finishes. The fixture can be cleaned with a damp cloth and mild detergent if needed.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.
C37 - 35W nominal, .30 A input - 4548 lm. Dimmable (0-10V).
C49 - 45W nominal, .40 A input - 5878 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

SUSPENSION SYSTEM

The 2601 Series is available in multiple colors and four suspension methods:

CC1 - The **Cord & Single Cable** suspension is a versatile option. Both the power cord and aircraft cable are field trimmed for mounting, with additional options for up to 10' and 20' drops.

CC3 - The **Cord & Three Cable** mounted system offers the modern alternative. Both the power cord and aircraft cables are field trimmed for mounting, with additional options for up to 10' and 20' drops.

SCM - The **Stem & Cable Mount** adds a contemporary flair to the classic look. The standard overall height (OAH) can be extended with stem sections and aircraft cable that are field trimmed to fit the application - see accessories section.

SSM - The standard **Single Stem Mount** traditional pendant style. The SSM has a standard OAH, with additional stem sections available in 1' and 2' lengths to extend the drop - see accessories section. Stem additions include coupling, and are field installed.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

ORDERING INFORMATION

2601 - _____
Model 2. 3. 4. 5. 6. 7. 8. (if required)

2. SIZE

24 24" dia.
30 30" dia.

3. SUSPENSION FINISH

CC1 & CC3
BL Black
NT Nickel Tone
WH White

SCM & SSM
BL Black
BZ Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NT Nickel Tone
PL Platinum
WH White

4. WATTAGE

24 & 30 SIZE
C37 35W C Series LED
C49 45W C Series LED

5. TRIM FINISH

BL Black
BZ Bronze
BW Chestnut Brown
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NL Natural Wood
NT Nickel Tone
PL Platinum
WH White

6. SUSPENSION

CC1 Cord & Single Cable
CC3 Cord & Three Cable
SCM Stem & Cable Mount
SSM Single Stem Mount

7. COLOR TEMPERATURE

35K 3500K color temperature
27K 2700K color temperature
30K 3000K color temperature
40K 4000K color temperature


PROJECT:

MODEL #:

FIXTURE TYPE:



NT suspension finish, NT trim finish, CC1 suspension

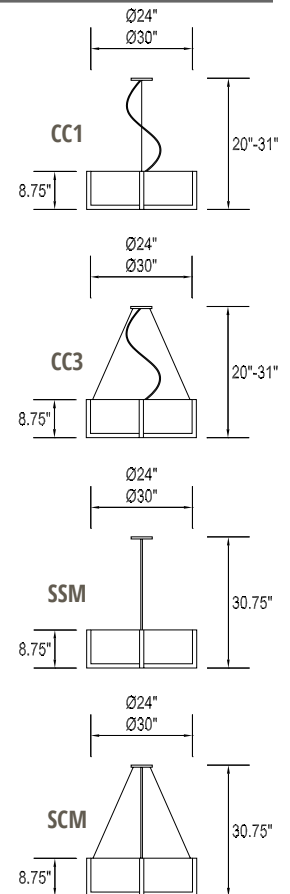

Notes: (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

ACCESSORIES (field installed - order separately)

390001xx SCM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
390002xx SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
320029WHA Top Cover Set: 24 size, White Acrylic
320030WHA Top Cover Set: 30 size, White Acrylic