



White Acrylic (WHA) diffuser

## DIFFUSER

The drum features a high quality UV stabilized white acrylic outer shell. The base (bottom) of the drum features an inset section and is constructed with high transmission white acrylic. The fixture can be cleaned with a damp cloth and mild detergent if needed.

## HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

## LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs  
Amperage rated @ 110V input  
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult [Brownlee.com](http://Brownlee.com) for performance of all CCTs.

B12 - 12W nominal, .10 A input - 1583 lm. Dimmable (0-10V).  
C17 - 16W nominal, .15 A input - 2287 lm. Dimmable (0-10V).  
C24 - 23W nominal, .20 A input - 3138 lm. Dimmable (0-10V).  
C37 - 35W nominal, .30 A input - 4657 lm. Dimmable (0-10V).  
C49 - 45W nominal, .40 A input - 6276 lm. Dimmable (0-10V).

## MOUNTING

Directly to j-box (by others). Mounting hardware included.

## SUSPENSION SYSTEM

The 2616 Series is available in multiple colors and four suspension methods:

**CC1 – Cord & Single Cable:** Both the power cord and aircraft cable can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops. Recommended for pendants up to 36"Ø only.

**CC3 – Cord & Three Cable:** Both the power cord and aircraft cables can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops.

**SCM – Stem & Cable Mount:** Steel stem in your choice of finish with three aircraft cables. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section.

**SSM – Single Stem Mount:** Traditional pendant style. Steel stem in your choice of finish. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section. Recommended for pendants up to 36"Ø only.


## WARRANTY

5 year limited warranty on this LED product. Consult factory for details.



# FAUXNUT

## DIMENSIONAL DRAWING

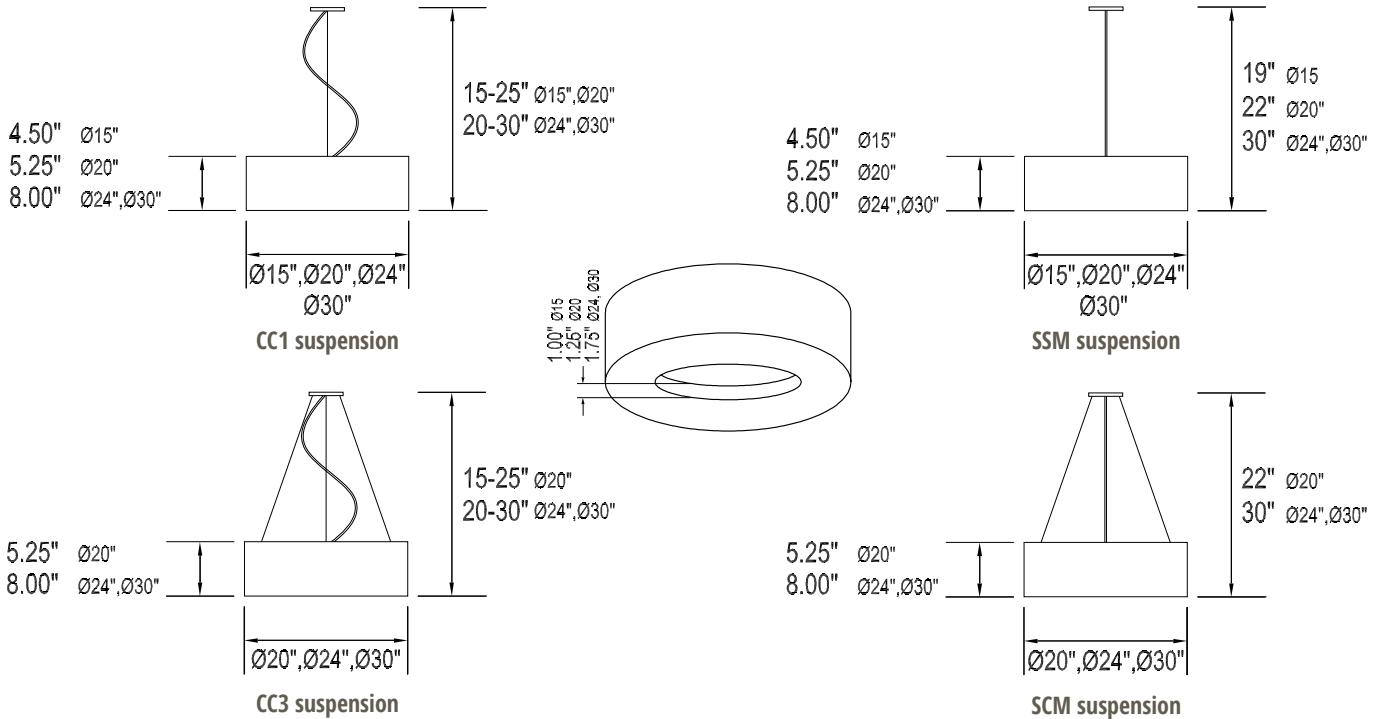

## ORDERING INFORMATION



2616 - 2. - 3. - 4. - 5. - 6. - 7. - 8. (if required)							
2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	6. SUSPENSION	7. COLOR TEMPERATURE	8. AVAILABLE OPTIONS	
15 15" dia. 20 19.25" dia. 24 24" dia. 30 30" dia.	<b>CC1 &amp; CC3</b> <b>BL</b> Black <b>NT</b> Nickel Tone <b>WH</b> White  <b>SCM &amp; SSM</b> <b>BL</b> Black <b>BZ</b> Bronze <b>GM</b> Gun Metal <b>MB</b> Metallic Bronze <b>MG</b> Metallic Gold <b>NT</b> Nickel Tone <b>PL</b> Platinum <b>WH</b> White	<b>15 SIZE</b> <b>B12</b> 12W B Series LED  <b>C17</b> 16W C Series LED <b>C24</b> 23W C Series LED  <b>20 SIZE</b> <b>C24</b> 23W C Series LED <b>C37</b> 35W C Series LED <b>C49</b> 45W C Series LED  <b>24 &amp; 30 SIZE</b> <b>C37</b> 35W C Series LED <b>C49</b> 45W C Series LED	<b>WHA</b> White Acrylic <b>WBK</b> Woven Black	<b>CC1</b> Cord & Single Cable <b>CC3</b> Cord & Three Cable (All except 15 size) <b>SCM</b> Stem & Cable Mount (All except 15 size) <b>SSM</b> Single Stem Mount	<b>35K</b> 3500K color temperature <b>27K</b> 2700K color temperature <b>30K</b> 3000K color temperature <b>40K</b> 4000K color temperature	<b>90R<sup>0</sup></b> 90 CRI (3000K only) <b>BAC<sup>1</sup></b> Buy American Compliant <b>CE1</b> 3' - 10' Cord/Cable Extension (CC1 & CC3 only) <b>CE2</b> 10' - 20' Cord/Cable Extension (CC1 & CC3 only) <b>DTR<sup>4</sup></b> Triac (Line Voltage) Dimming (120V) <b>ES<sup>6</sup></b> ENERGY STAR <sup>®</sup> (Not available in 90 CRI) <b>FCL<sup>7</sup></b> French Canadian Labels <b>T24<sup>9</sup></b> Title 24 JA8 Compliant (B12, C24 & C49 in 3000K only)	

### ACCESSORIES (field installed - order separately)

<b>390001xx</b>	SCM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
<b>390002xx</b>	SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
<b>320029WHA</b>	Top Cover Set: 24 size, White Acrylic
<b>320030WHA</b>	Top Cover Set: 30 size, White Acrylic

**Notes:** (0) **90R** - cannot be combined with ES. (1) **BAC** - cannot be combined with FCL. (2) **BBI/BBS/BBC** - cannot be combined with ECW, EXT, or T24. (3) **BLD** - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) **DTR** - cannot be combined with BLD or OCC. (5) **ECW** - cannot be combined with BBI, BBC, or DTR. (6) **ES** - cannot be combined with 90R or T24. (7) **FCL** - cannot be combined with BAC or T24. (8) **OCC** - integral ON/OFF occupancy sensor. (9) **T24** - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) **BBS** - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) **PCH/PC4** - cannot be combined with BLD or OCC. **Add'l Notes:** \***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. \*\***BLD** - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

### Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.