



Nickel Tone (NT) finish, Cable Guide - Mid (CG2) suspension

2656 LED

The 2656 LED features a clean aluminum spinning, contemporary suspension system and shallow white acrylic diffuser. This unit is perfect for a variety of spaces from lobbies and entryways to foyers and corridors in applications such as libraries, schools, hotels and more. The aircraft cables can be specified in three different positions to fit the aesthetic needs of the space. This unit provides a generous amount of indirect uplight in addition to downlight.

FINISHES



SALEM

STANDARD SPECIFICATIONS

BOWL

Smooth UV stabilized white acrylic. The 30" bowl is formed from 0.188" material.

TRIM

The trim consists of a spun aluminum trim ring, a formed, cold rolled steel ceiling canopy, stainless steel aircraft cables, and a steel stem.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

C37 - 35W nominal, .30 A input - 4460 lm. Dimmable (0-10V).

C49 - 45W nominal, .40 A input - 5916 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 2656 series is available in all Brownlee paint finishes as a standard offering.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:

MODEL #:

FIXTURE TYPE:

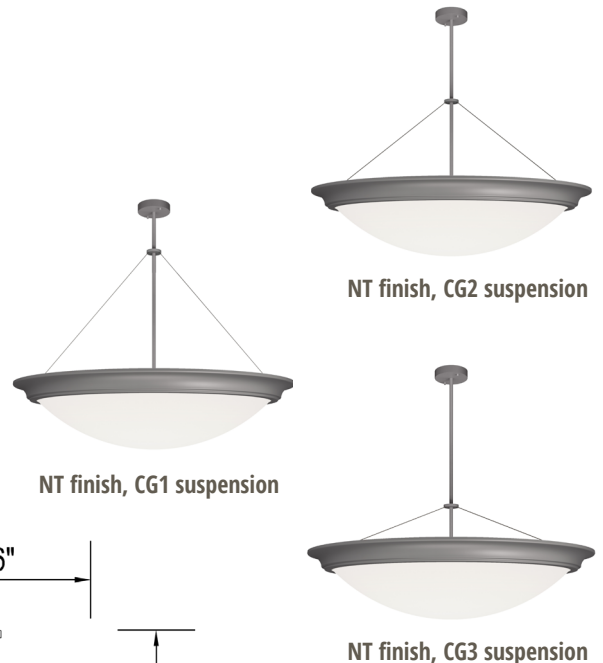

DAMP



ORDERING INFORMATION

2656 - Model - 2. - 3. - 4. - 5. - 6.

2. FINISH

STANDARD

BL	Black
BZ	Bronze
GM	Gun Metal
MB	Metallic Bronze
MG	Metallic Gold
NT	Nickel Tone
PL	Platinum
WH	White

CUSTOM

Provide color sample or RAL code to match

3. WATTAGE

C37	35W C Series LED
C49	45W C Series LED

4. SUSPENSION

CG1	Cable Guide - High
CG2	Cable Guide - Mid
CG3	Cable Guide - Low

5. COLOR TEMPERATURE

35K	3500K standard color temperature
27K	2700K color temperature
30K	3000K color temperature
40K	4000K color temperature

6. AVAILABLE OPTIONS

90R⁰	90 CRI (3000K only)
BAC¹	Buy American Compliant
DTR⁴	Triac (Line Voltage) Dimming (120V)
ES⁶	ENERGY STAR [®] (Not available in 90 CRI)
FCL⁷	French Canadian Labels
SVL	Swivel Canopy
T24⁹	Title 24 JA8 Compliant (C49 in 3000K only)

ACCESSORIES (FIELD INSTALLED)

ORDERING NUMBER	DESCRIPTION
390002XX	Stem Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)

Notes: (0) 90R - cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW, EXT, or T24. (3) BLD - includes integral OCC sensor (do not combine with OCC option). Cannot be combined with DTR or T24. (4) DTR - cannot be combined with BLD or T24. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC or T24. (8) OCC - integral ON/OFF occupancy sensor. (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with BBI, BBC, BBS, BLD, DTR, ES, or FCL. (10) BBS - cannot be combined with BLD, ECW, EXT, OCC, or T24. (11) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - integral OCC sensor with onboard control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to 50% (factory default), 30%, 20% or 10%. 3: Remain in continuous dimmed state (factory default) or turn off after set period.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.