



Brushed Nickel (BN) finish | FL2 diffuser

2681 LED

An architectural solution for the specification market yet affordable enough for everyday projects. Two sizes. Three diffuser options. No exposed hardware. Refer to the 2081 for a surface mount version of this product. Custom finishes available.

TRIM FINISHES

METRO

STANDARD SPECIFICATIONS

HOUSING

Cold rolled 20 GA steel, formed with die punch tooling with no exposed hardware. The pan has three steel brackets which mate with the diffuser.

DIFFUSER

Translucent, UV stabilized, white acrylic. Diffuser is vacuum formed and features a secure "twist lock" tool free installation method.

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH (HOUSING & CANOPY)

The standard finish is a sturdy electroplated brushed nickel. Options include all Brownlee paint finishes. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:

MODEL #:

FIXTURE TYPE:

SUSPENSION SYSTEM

Three stainless steel aircraft cables and a power cord allow mounting at multiple heights from 10" to 25". Both the power cord and aircraft cables are field trimmed for mounting, with additional options for up to 10' and 20' drops.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B12 - 12W nominal, .10 A input - 918 lm. Dimmable (0-10V).

C17 - 16W nominal, .15 A input - 1327 lm. Dimmable (0-10V).

C24 - 23W nominal, .20 A input - 1821 lm. Dimmable (0-10V).

C37 - 35W nominal, .30 A input - 3428 lm. Dimmable (0-10V).

C49 - 45W nominal, .40 A input - 4223 lm. Dimmable (0-10V).




BN finish, RD2 diffuser




BN finish, FL2 diffuser




finish, FL1 diffuser

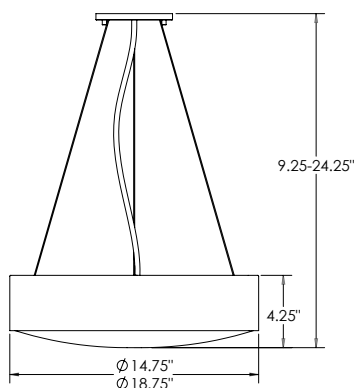

RD2 diffuser

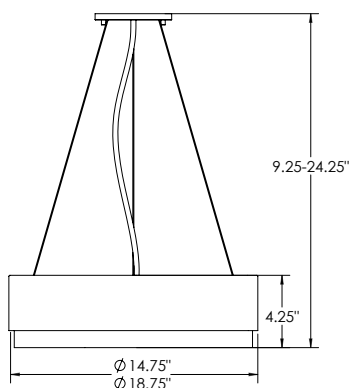

FL1 diffuser

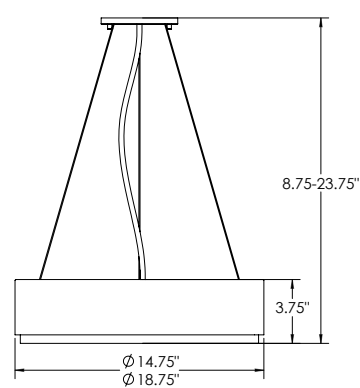

FL2 diffuser

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

METRO



DAMP



ORDERING INFORMATION

2681 - _____ - _____ - _____ - _____ - _____ - _____
Model 2. 3. 4. 5. 6. 7. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	6. COLOR TEMPERATURE
15 14.75" dia 19 18.75" dia	STANDARD BN Brushed Nickel OPTIONAL BL Black BZ Bronze GM Gun Metal MB Metallic Bronze MG Metallic Gold NT Nickel Tone PL Platinum WH White CUSTOM Provide color sample or RAL code to match	15 SIZE B12 12W B Series LED C17 16W C Series LED C24 23W C Series LED 19 SIZE C24 23W C Series LED C37 35W C Series LED C49 45W C Series LED	FL1 Style 1 Flat Diffuser FL2 Style 2 Flat Diffuser RD2 Style 2 Round Diffuser	35K 3500K standard color temperature 27K 2700K color temperature 30K 3000K color temperature 40K 4000K color temperature
7. AVAILABLE OPTIONS				
90R⁰ 90 CRI (3000K only) BAC¹ Buy American Compliant BLD^{3**} Bi-Level Dimming CE1 3' - 10' Cord/Cable Extension CE2 10' - 20' Cord/Cable Extension DTR⁴ Triac (Line Voltage) Dimming (120V) ES⁶ ENERGY STAR® (Not available in 90 CRI) FCL⁷ French Canadian Labels OCC⁸ Occupancy Sensor T24⁹ Title 24 JA8 Compliant (B12, C24 & C49 in 3000K only)				

Notes: (0) **90R** - cannot be combined with ES or T24 (1) **BAC** - cannot be combined with FCL (2) **BBI/BBS/BBC** - cannot be combined with DTR, ECW, EXT, or T24 (3) **BLD** - cannot be combined with DTR, OCC, or T24 (4) **DTR** - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) **ECW** - cannot be combined with BBI, BBC, or DTR (6) **ES** - cannot be combined with 90R, FCL, or T24 (7) **FCL** - cannot be combined with BAC, ES, or T24 (8) **OCC** - cannot be combined with BLD (9) **T24** - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) **BBS** - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) **PCH/PC4** - cannot be combined with BLD or OCC

Add'l Notes: ***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. ****BLD** - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.