



1120 LED

The REVERSE interior sconce collection features an LED light source directed towards the wall which provides indirect accent lighting for a variety of applications. A key feature to this series is the half-round frosted acrylic LED module optic which throws light outward and reduces glare. Perfect for lobbies, corridors, bathroom vanity applications, and more. ADA compliant. The REVERSE-“S” is for single direction LED. For a dual direction version of this product, refer to the REVERSE-D (Model #: 1125).

FINISHES



REVERSE-S

STANDARD SPECIFICATIONS

HOUSING

Formed, cold rolled steel. Outer frame contains no exposed hardware.
Low profile projection from wall.

DIFFUSER

Extruded half-round frosted acrylic diffuser minimizes hot spots while providing superior output in the indirect category.

LED PERFORMANCE

3500K standard, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input. Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

H08 - 8W nominal, .07 A input - 1006 lm. Dimmable (0-10V). 120-277V.

H10 - 10W nominal, .08 A input - 1270 lm. Dimmable (Triac). 120V Only.

MOUNTING


Fixture mounts directly to a vertically positioned 2x4 j-box (by others). Diffuser and housing assembly ship preassembled for simplified installation. Optional cover plate available if mounting to a 4x4 junction box - refer to accessories. Indoors only.

FINISH

Available in all Brownlee paint finishes as a standard offering.
Installation outdoors voids the Brownlee Limited Warranty.

WARRANTY

5 year limited warranty on this LED product.
Consult factory for details.

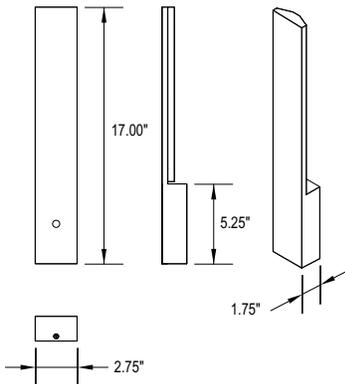

PROJECT:
MODEL #:
FIXTURE TYPE:



ORDERING INFORMATION

1120 - _____
Model 2. 3. 4. 5.



DAMP



2. FINISH

STANDARD

- BL** Black
- BU** Pastel Blue
- GN** Pastel Green
- MG** Metallic Gold
- NT** Nickel Tone
- OR** Florida Orange
- RD** Red
- WH** White
- YL** Yellow

CUSTOM

Provide color sample or RAL code to match

ANTIMICROBIAL

Available in a select number of finishes. Refer to the Options section of this sheet for details ("AMF").

3. WATTAGE

- H08** 8W H Series LED
- H10** 10W H Series LED

4. COLOR TEMPERATURE

- 35K** 3500K standard color temperature
- 30K** 3000K color temperature
- 40K** 4000K color temperature

5. AVAILABLE OPTIONS

- AMF** Antimicrobial Finish (BL, NT, WH only) (See AMF note)
- BAC**¹ Buy American Compliant
- FCL**⁷ French Canadian Labels

AMF Note: Antimicrobial powder coat is applied to the exposed metal fixture parts and can inhibit the growth of mildew and spoilage causing microbes on the finish.

ACCESSORIES (field installed - order separately)

100043xx Cover Plate - 6.75" l x 4.25" w - Specify Finish (xx) (Covers 4x4 jbox)

*Note: This accessory plate mounts to a 4x4 box via universal crossbar (by others). If mounting this plate to a 2x4 switch box, the direction of the plate must follow the direction of the 2x4 box lengthwise (i.e. box, plate, and fixture must all be vertically positioned).

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JAB labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.