

1450

STANDARD SPECIFICATIONS

TRIM

Poured cast styrene trim features a simple Gaelic design, with the hardware molded in place.

DIFFUSER

Translucent, UV stabilized white acrylic. The 0.250" thick diffuser features machined grooves and a cross-sanded finish, before it is rolled over a steel form.

PAN

Formed aluminum design, finished in a powder coat high reflectance white paint.

ELECTRICAL

Quad CFL, 4-pin G24q Base 2700K lamp – 120-277V Electronic HPF Ballast
 GU24 CFL, 2-prong Base 2700K lamp – 120V Electronic NPF Ballast

Brownlee Lighting does not recommend GU24 base lamps for 24 hour operation due to lamp manufacturer specifications.

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.


MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 1450 series has medallions available in Nickel Tone as a standard, and in select Brownlee paints as an optional offering.

PROJECT:
MODEL #:
FIXTURE TYPE:

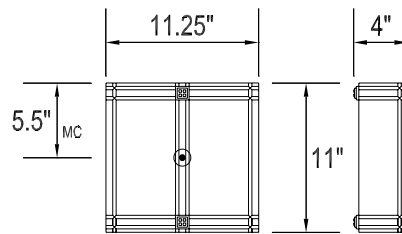

DAMP



ORDERING INFORMATION

1450 - _____ - _____ - _____
 Model 2. 3. 4. (if required)

2. FINISH

STANDARD
NT Nickel Tone

OPTIONAL
BL Black
BZ Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
PL Platinum
WH White

CUSTOM
 Provide color sample or RAL code to match

3. WATTAGE

13Q 1-13W Quad CFL, elec. HPF
213Q 2-13W Quad CFL, elec. HPF
18Q 1-18W Quad CFL, elec. HPF
218Q 2-18W Quad CFL, elec. HPF
26Q 1-26W Quad CFL, elec. HPF
226Q 2-26W Quad CFL, elec. HPF

13G 1-13W GU24 CFL, elec. NPF
213G 2-13W GU24 CFL, elec. NPF
18G 1-18W GU24 CFL, elec. NPF
218G 2-18W GU24 CFL, elec. NPF

4. AVAILABLE OPTIONS

BAC Buy American Compliant
DIM1 Dimming Ballast (120V) (Q only)
DIM2 Dimming Ballast (277V) (Q only)
ES ENERGY STAR® (26Q & 226Q only)

ACCESSORIES (field installed)
BBR¹ Remote Battery Backup (Q only)

1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.