SHADER SHALLOW

PROJECT:	
MODEL #:	
FIXTURE TYPE:	

STANDARD SPECIFICATIONS

SHADE
The shade is constructed from traditional lampshade material with a polyethylene liner, wrapped around a steel frame. It is available in multiple materials, divided into two pricing tiers.

TRIM
Cold rolled steel stem and canopy. The lower cover is held in place with a solid brass finial. All trim pieces available in all Brownlee finish.

DIFFUSER
A white acrylic cover is located on the bottom of the shade with an optional cover for the top.

HOUSING
Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD
120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input
Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

3500K delivered lumens noted. Consult Brownlee.com for performance of all CCTs.
C49 - 45W nominal, .40 A input - 4265 lm. Dimmable (0-10V).

MOUNTING
Directly to j-box (by others). Mounting hardware included.

FINISH
The 2067 series is available in all Brownlee paint finishes as a standard offering.

WARRANTY
5 year limited warranty on this LED product. Consult factory for details.

BL finish, GR1 diffuser

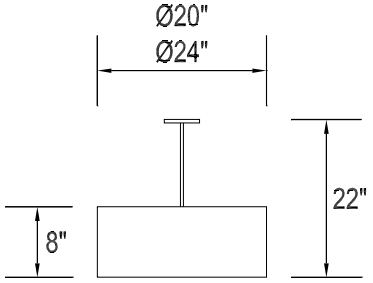

DAMP

SUPPORTS T24 COMPLIANCE

ORDERING INFORMATION

2067 - _____ - _____ - _____ - _____ - _____ - _____ - _____

Model | 2. | 3. | 4. | 5. | 6. | 7. (if required)

2. SIZE

20	20" dia.
24	24" dia.

3. FINISH

STANDARD

BL	Black
BZ	Bronze
GM	Gun Metal
MB	Metallic Bronze
MG	Metallic Gold
NT	Nickel Tone
PL	Platinum
WH	White

CUSTOM
Provide color sample or RAL code to match

4. WATTAGE

C49	45W C Series LED

5. DIFFUSER

TIER 1

SN1	Satin Weave - White
SN2	Satin Weave - Ivory

TIER 2

GR1	Grasscloth - Natural
BK1	Black Linen

6. COLOR TEMPERATURE

35K	3500K standard color temperature
27K	2700K color temperature
30K	3000K color temperature
40K	4000K color temperature

7. AVAILABLE OPTIONS

90R[0]	90 CRI (3000K only)
BAC[1]	Buy American Compliant
DTR[4]	Triac (Line Voltage) Dimming (120V)
ES[6]	ENERGY STAR® (Not available in 90 CRI)
FCL[7]	French Canadian Labels
SVL	Swivel Canopy / Slope Ceiling
T24[9]	Title 24 Compliant (3000K only)

ACCESSORIES (field installed - order separately)

390002xx	SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
210002WHA	Top Cover Set: 20 size, White Acrylic
210003WHA	Top Cover Set: 24 size, White Acrylic

Notes: (0) 90R - cannot be combined with ES or T24 **(1) BAC** - cannot be combined with FCL **(2) BBI/BBS/BBC** - cannot be combined with DTR, ECW, EXT, or T24 **(3) BLD** - cannot be combined with DTR, OCC, or T24 **(4) DTR** - cannot be combined with BBI, BBC, BBS, BLD or T24 **(5) ECW** - cannot be combined with BBI, BBC, or DTR **(6) ES** - cannot be combined with 90R, FCL, or T24 **(7) FCL** - cannot be combined with BAC, ES, or T24 **(8) OCC** - cannot be combined with BLD **(9) T24** - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL **(10) BBS** - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 **(11) PCH/PC4** - cannot be combined with BLD or OCC
Add'l Notes: *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. ****BLD** - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

Specifications and dimensions subject to change without notice.
Consult your Brownlee Lighting representative for availability and ordering information.

BROWNLEE LIGHTING
www.brownlee.com

REVISED 2020.08.26