

SHADER DEEP

STANDARD SPECIFICATIONS

SHADE

The shade is constructed from traditional lampshade material with a polyethylene liner, wrapped around a steel frame. It is available in multiple materials, divided into two pricing tiers.

TRIM

Cold rolled steel stem and canopy. The lower cover is held in place with a solid brass finial. All trim pieces available in all Brownlee finish.

DIFFUSER

A white acrylic cover is located on the bottom of the shade with an optional cover for the top.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

3500K delivered lumens noted. Consult Brownlee.com for performance of all CCTs.

C49 - 45W nominal, .40 A input - 4265 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 2068 series is available in all Brownlee paint finishes as a standard offering.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:

MODEL #:

FIXTURE TYPE:

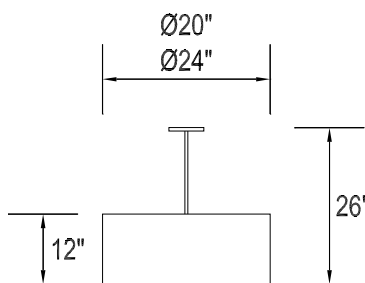

DAMP



ORDERING INFORMATION

2068

Model

2.

3.

4.

5.

6.

7. (if required)

2. SIZE

20 20" dia.
24 24" dia.

3. FINISH

STANDARD
BL Black
BZ Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NT Nickel Tone
PL Platinum
WH White

CUSTOM
Provide color sample or RAL code to match

4. WATTAGE

C49 45W C Series LED

5. DIFFUSER

TIER 1
SN1 Satin Weave - White
SN2 Satin Weave - Ivory

TIER 2
GR1 Grasscloth - Natural
BK1 Black Linen

6. COLOR TEMPERATURE

35K 3500K standard color temperature
27K 2700K color temperature
30K 3000K color temperature
40K 4000K color temperature

7. AVAILABLE OPTIONS

90R⁹ 90 CRI (3000K only)
BAC¹ Buy American Compliant
DTR⁴ Triac (Line Voltage) Dimming (120V)
ES⁶ ENERGY STAR[®] (Not available in 90 CRI)
FCL⁷ French Canadian Labels
SVL Swivel Canopy / Slope Ceiling
T24⁹ Title 24 Compliant (3000K only)

ACCESSORIES (field installed - order separately)

390002xx SSM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)
210002WHA Top Cover Set: 20 size, White Acrylic
210003WHA Top Cover Set: 24 size, White Acrylic

Notes: (0) 90R - cannot be combined with ES or T24 (1) BAC - cannot be combined with FCL (2) BBI/BBS/BBC - cannot be combined with DTR, ECW, EXT, or T24 (3) BLD - cannot be combined with DTR, OCC, or T24 (4) DTR - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) ECW - cannot be combined with BBI, BBC, or DTR (6) ES - cannot be combined with 90R, FCL, or T24 (7) FCL - cannot be combined with BAC, ES, or T24 (8) OCC - cannot be combined with BLD (9) T24 - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) BBS - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) PCH/PC4 - cannot be combined with BLD or OCC

Add'l Notes: *BBI/BBS/BBC - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. **BLD - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.



REVISED
2020.08.26