

2070

STANDARD SPECIFICATIONS

SHADE

The shade is constructed from traditional lampshade material with a polyethylene liner, wrapped around a steel frame. It is available in multiple materials, divided into two pricing tiers. Tier 1 features satin linens, burlap, and faux silk. Tier 2 includes grasscloth, and 100% shantung and pongee silks.

TRIM

Cold rolled steel stem and canopy, and additional aircraft cable accents. The lower cover is held in place with a solid brass finial. All trim pieces available in all Brownlee paint finishes.

DIFFUSER

A white acrylic cover is located on both the top and the bottom of the shade.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

ELECTRICAL

Quad CFL, 4-pin G24q Base 2700K lamp – 120-277V Electronic HPF Ballast
Triple CFL, 4-pin GX24Q Base 2700K lamp – 120-277V Electronic HPF Ballast
GU24 CFL, 2-prong Base 2700K lamp – 120V Electronic NPF Ballast

Brownlee Lighting does not recommend GU24 base lamps for 24 hour operation due to lamp manufacturer specifications.

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH


The 2070 series is available in all Brownlee paint finishes as a standard offering.

ORDERING INFORMATION

PROJECT:
MODEL #:
FIXTURE TYPE:



BZ finish, SP3 diffuser

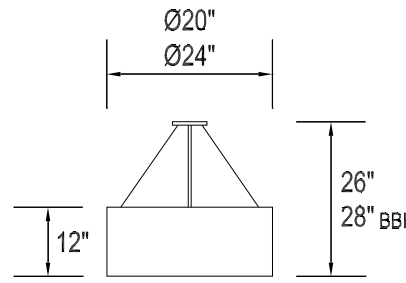

DRY

2070	-	-	-	-	-	-	-
Model	2.	3.	4.	5.	6. (if required)		

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	6. AVAILABLE OPTIONS
20 20" dia. 24 24" dia.	STANDARD BL Black BZ Bronze GM Gun Metal MB Metallic Bronze MG Metallic Gold NT Nickel Tone PL Platinum WH White CUSTOM Provide color sample or RAL code to match	413Q 4-13W Quad CFL, elec. HPF 418Q 4-18W Quad CFL, elec. HPF 426Q 4-26W Quad CFL, elec. HPF 432T 4-32W Triple CFL, elec. HPF 442T 4-42W Triple CFL, elec. HPF 413G 4-13W GU24 CFL, elec. NPF 418G 4-18W GU24 CFL, elec. NPF	TIER 1 SN1 Satin Weave - White SN2 Satin Weave - Ivory SN3 Satin Weave - Aurora Gold BP1 Burlap - Ivory TIER 2 SS1 Silk Shantung - White SS2 Silk Shantung - Cream SS3 Silk Shantung - Taupe SP3 Genuine Silk Pongee - Natural GR1 Grasscloth - Natural BK1 Black Percale	BAC Buy American Compliant BBI¹ Integral Battery Backup (Q & T only, adds 2" to depth) DIM1 Dimming Ballast (120V) (Q & T only) DIM2 Dimming Ballast (277V) (Q & T only) ES ENERGY STAR® (426Q only)

1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.