

2322

STANDARD SPECIFICATIONS

PAN

Cold rolled steel, formed in a die, finished with an electroplated brushed nickel coating that will withstand most nicks and scratches.

DIFFUSER

Translucent, UV stabilized white acrylic. The drum shape features a fabric material bonded to the walls, allowing for ease of cleaning with a dry or damp cloth. You can choose from a selection of fabrics.

ELECTRICAL

Quad CFL, 4-pin G24q Base 2700K lamp – 120-277V Electronic HPF Ballast
GU24 CFL, 2-prong Base 2700K lamp – 120V Electronic NPF Ballast

Brownlee Lighting does not recommend GU24 base lamps for 24 hour operation due to lamp manufacturer specifications.

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

MOUNTING

The 2322 is designed to be mounted directly to a j-box (by others). Mounting hardware included.

FINISH

The standard finish is a sturdy electroplated brushed nickel. Options include all Brownlee paint finishes. Plated finishes such as Brushed Nickel are suitable for indoor applications only. Installation outdoors voids the Brownlee Limited Warranty.

ORDERING INFORMATION

2322 - _____
Model 2. 3. 4. 5. (if required)

2. FINISH

STANDARD
BN Brushed Nickel

OPTIONAL
BL Black
BZ Bronze
GM Gun Metal
MB Metallic Bronze
MG Metallic Gold
NT Nickel Tone
PL Platinum
WH White

CUSTOM
Provide color sample or RAL code to match

3. WATTAGE

213Q 2-13W Quad CFL, elec. HPF
313Q 3-13W Quad CFL, elec. HPF
18Q 1-18W Quad CFL, elec. HPF
218Q 2-18W Quad CFL, elec. HPF
26Q 1-26W Quad CFL, elec. HPF
226Q 2-26W Quad CFL, elec. HPF

213G 2-13W GU24 CFL, elec. NPF
313G 3-13W GU24 CFL, elec. NPF
18G 1-18W GU24 CFL, elec. NPF
218G 2-18W GU24 CFL, elec. NPF

4. DIFFUSER

MAL Mahogany Linen
NAL Natural Linen
ROW Rolling Waves
WHL White Linen

5. AVAILABLE OPTIONS

BAC Buy American Compliant
DIM1 Dimming Ballast (120V) (Q only)
DIM2 Dimming Ballast (277V) (Q only)
ES ENERGY STAR® (26Q & 226Q only)
OCC² Occupancy Sensor

ACCESSORIES (field installed)
BBR¹ Remote Battery Backup (Q only)


PROJECT:
MODEL #:
FIXTURE TYPE:



MB finish, NAL diffuser



GM finish, WHL diffuser

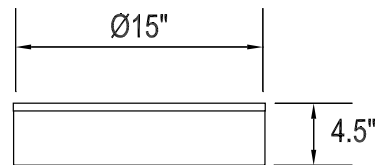

DAMP



1) BBI & BBR options have an operating temperature of +32°F to +122°F. BBIC & BBRC options have an operating temperature of -4°F to +131°F. BBR & BBRC are field installed options available on all HPF fluorescent (CFL & T8) fixtures, except those with dimming ballasts. The maximum distance between the battery and the fixture is 10' for HPF ballasts.

2) Occupancy sensor operates with microwaves and is not recommended for use in waiting areas with elevators.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.