

TWO-TIER

STANDARD SPECIFICATIONS

PAN

Cold rolled 22 GA steel, formed in a die, finished in a powder coat high reflectance white paint. The pan features weld nuts for a "twist and seat" installation of the diffuser.

DIFFUSER

Translucent, UV stabilized white acrylic. The two tier drum shape features a twist on the classic lampshade look. The material is bonded to walls of the drum, and is available in multiple styles.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

B12 - 12W nominal, .10 A input - 1200 lm. Dimmable (0-10V).
 C17 - 16W nominal, .15 A input - 1734 lm. Dimmable (0-10V).
 C24 - 23W nominal, .20 A input - 2379 lm. Dimmable (0-10V).
 C37 - 35W nominal, .30 A input - 3530 lm. Dimmable (0-10V).
 C49 - 45W nominal, .40 A input - 4758 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:



WHL diffuser

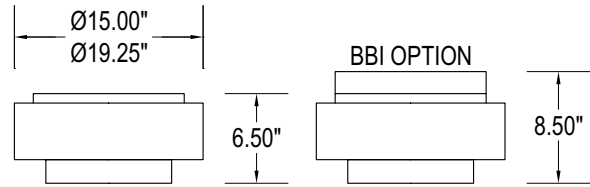

DAMP



ORDERING INFORMATION

2342

Model

2.

3.

4.

5.

6. (if required)

2. SIZE

15 15" dia.
20 19.25" dia.

3. WATTAGE

15 SIZE

B12 12W B Series LED
C17 16W C Series LED
C24 23W C Series LED

20 SIZE

C24 23W C Series LED
C37 35W C Series LED
C49 45W C Series LED

4. DIFFUSER

NAL Natural Linen
WHL White Linen

*NOTE: MAL & ROW have been discontinued on this model - contact factory for availability.

5. COLOR TEMPERATURE

35K 3500K standard color temperature
27K 2700K color temperature
30K 3000K color temperature
40K 4000K color temperature

6. AVAILABLE OPTIONS

90R⁰ 90 CRI (3000K only)
BAC¹ Buy American Compliant
BBI^{2*} Integral Battery Backup (Adds 2" to depth)
BLD^{3}** Bi-Level Dimming
DTR⁴ Triac (Line Voltage) Dimming (120V)
ES⁵ ENERGY STAR® (Not available in 90 CRI)
EXT Extended Housing (Intended to match BBI aesthetic) (Adds 2" to depth)
FCL⁷ French Canadian Labels
OCC⁸ Occupancy Sensor
T24⁹ Title 24 Compliant (B12, C24 & C49 in 3000K only)

Notes: (0) **90R** - cannot be combined with ES or T24 (1) **BAC** - cannot be combined with FCL (2) **BBI/BBS/BBC** - cannot be combined with DTR, ECW, EXT, or T24 (3) **BLD** - cannot be combined with DTR, OCC, or T24 (4) **DTR** - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) **ECW** - cannot be combined with BBI, BBC, or DTR (6) **ES** - cannot be combined with 90R, FCL, or T24 (7) **FCL** - cannot be combined with BAC, ES, or T24 (8) **OCC** - cannot be combined with BLD (9) **T24** - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) **BBS** - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) **PCH/PC4** - cannot be combined with BLD or OCC

Add'l Notes: ***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. ****BLD** - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

