2616

PROJECT:

MODEL #:

FIXTURE TYPE:

STANDARD SPECIFICATIONS

DIFFUSER
The drum features a high quality UV stabilized white acrylic outer shell. The base (bottom) of the drum features an inset section and is constructed with high transmission white acrylic. The fixture can be cleaned with a damp cloth and mild detergent if needed.

HOUSING
Formed, cold rolled steel design, finished in a high reflectance powder coat white.

ELECTRICAL
Quad CFL, 4-pin G24q Base 2700K lamp – 120-277V Electronic HPF Ballast
Triple CFL, 4-pin GX24Q Base 2700K lamp – 120-277V Electronic HPF Ballast

Fluorescent fixtures utilizing an occupancy sensor should include a programmed start HPF ballast. Fluorescent lamps powered by instant start or rapid start ballasts, or GU24 base compact fluorescent lamps used in this application may result in severely shortened lamp life and/or ballast damage.

SUSPENSION SYSTEM
The 2616 Series is available in multiple colors and four suspension methods:

CC1 – Cord & Single Cable: Both the power cord and aircraft cable can be trimmed in the field. See optional ordering code C10 and C20 for extended 10' and 20' drops.

CC3 – Cord & Three Cable: Both the power cord and aircraft cables can be trimmed in the field. See optional ordering code C10 and C20 for extended 10' and 20' drops.

SCM – Stem & Cable Mount: Steel stem in your choice of finish with three aircraft cables. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see optional ordering codes ST1 and ST2.

SSM – Single Stem Mount: Traditional pendant style. Steel stem in your choice of finish. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see optional ordering codes ST1 and ST2.

MOUNTING
Directly to j-box (by others). Mounting hardware included.

NT suspension finish, WBK diffuser



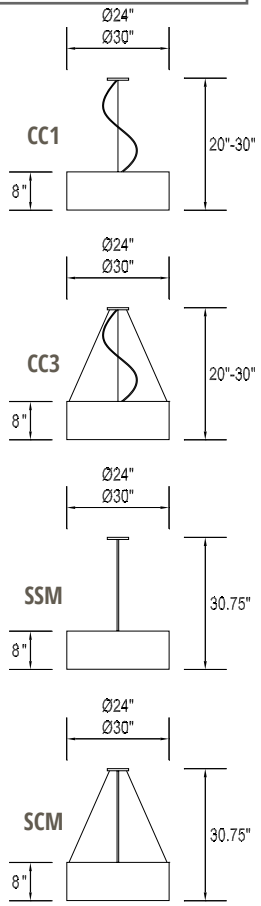

DRY

SUPPORTS T24 COMPLIANCE

ORDERING INFORMATION

2616 - _____ - _____ - _____ - _____ - _____ _____

Model | 2. | 3. | 4. | 5. | 6. | 7. (if required)

2. SIZE

24	24" dia.
30	30" dia.

3. SUSPENSION FINISH

CC1 & CC3

BL	Black
NT	Nickel Tone
WH	White

SCM & SSM

BL	Black
BZ	Bronze
GM	Gun Metal
MB	Metallic Bronze
MG	Metallic Gold
NT	Nickel Tone
PL	Platinum
WH	White

4. WATTAGE

24 & 30 SIZE

413Q	4-13W Quad CFL, elec. HPF
418Q	4-18W Quad CFL, elec. HPF
326Q	3-26W Quad CFL, elec. HPF
426Q	4-26W Quad CFL, elec. HPF
332T	3-32W Triple CFL, elec. HPF
432T	4-32W Triple CFL, elec. HPF
342T	3-42W Triple CFL, elec. HPF
442T	4-42W Triple CFL, elec. HPF

5. DIFFUSER

WA	White Acrylic
WBK	Woven Black

6. SUSPENSION

CC1	Cord & Single Cable
CC3	Cord & Three Cable
SCM	Stem & Cable Mount
SSM	Single Stem Mount

7. AVAILABLE OPTIONS

BAC	Buy American Compliant
DIM1	Dimming Ballast (120V) (Q & T only)
DIM2	Dimming Ballast (277V) (Q & T only)
ES	ENERGY STAR® (326Q & 426Q only)

EXTENSION OPTIONS

C10	3' - 10' Cord/Cable Mount (CC1 & CC3 only)
C20	10' - 20' Cord/Cable Mount (CC1 & CC3 only)
ST1	1' Stem Section (6' Max)
ST2	2' Stem Section (6' Max)

ACCESSORIES (field installed)

TCV	Top Cover

Specifications and dimensions subject to change without notice.
Consult your Brownlee Lighting representative for availability and ordering information.

BROWNLEE LIGHTING
www.brownlee.com

REVISED 2018.7.31