
OUTLINE PENDANT






2640 LED -

The Outline series is constructed of a low-profile white acrylic drum, with four laser cut cold rolled steel decorative trim pieces assembled to its outer wall. LED assembly (housing) covers the entire top surface of the drum to minimize dust/debris entry. Perfect for open office layouts, conference rooms, schools/libraries, hotel common areas, and more. Refer to model #: 2440 for surface mount.

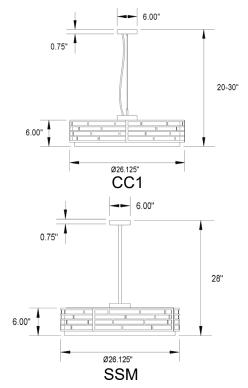

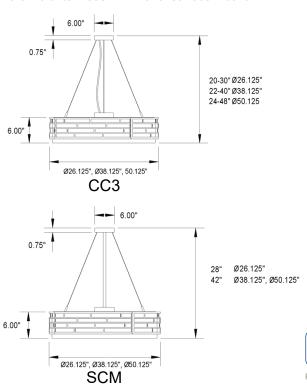

OUTLINE PENDANT

STANDARD SPECIFICATIONS - 2640 PENDANT

6" h low-profile white acrylic drum, with four laser cut cold rolled steel decorative trim pieces assembled to its outer wall. The base (bottom) of the diffuser is constructed of high transmission matte white acrylic.

Formed, cold rolled steel design, finished in a high reflectance powder coat white. The housing covers the entire top surface of the drum. No need for top cover.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 90+ CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs Amperage rated @ 110V input. Operating ambient temperature: -20°C / -4°F - 40°C / 104°F Delivered 3500K lumens noted. Consult Brownlee.com for performance of all CCTs.

26": H30 - 30W nominal, .27 A input - 3850 lm. Dimmable (0-10V). 38": H70 - 70W nominal, .59 A input - 7525 lm. Dimmable (0-10V). 50": H110 - 110W nominal, 94 A input - 11970 lm. Dimmable (0-10V).

26": H63 - 63W nominal, .53 A input - 6690 lm. Dimmable (0-10V). 38": H136 - 136W nominal, 1.20 A input - 15045 lm. Dimmable (0-10V). 50": H215 - 215W nominal, 1.86 A input - 23945 lm. Dimmable (0-10V).

SUSPENSION SYSTEM


CC1 - Cord & Single Cable: Both the power cord and aircraft cable can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops. (26" size only).

CC3 - Cord & Three Cable: Both the power cord and aircraft cables can be trimmed in the field. See optional ordering code CE1 and CE2 for extended 10' and 20' drops.

SSM - Single Stem Mount: Traditional pendant style. Steel stem in your choice of finish. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section. (26" size only).

SCM - Stem & Cable Mount: Steel stem in your choice of finish with three aircraft cables. The standard overall height (OAH) can be extended with additional stem sections in 1' and 2' intervals - see accessories section.

PROJECT: MODEL #: FIXTURE TYPE:

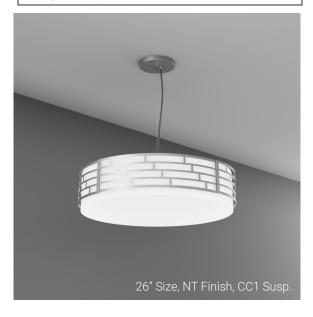

MOUNTING

26" size: directly to j-box (by others). Hardware included. 38" & 50" sizes: anchored to ceiling. Anchor plate included. Anchoring hardware not included. Trim pieces (4) around shade are field-installed to minimize damage in transit. Refer to model #: 2440 for a surface mount version of this product.

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.



ORDERING INFORMATION

390002xx

<u>2640</u> -		= =			- _	
2. 26 38 50	Vlodel SIZE 26" dia. 38" dia. 50" dia. Isizes listed above. line drawing.		TRIM FINISH nish applies to shade cage or Black Pastel Blue (RAL 5024) Bronze Pastel Green (RAL 6019) Metallic Gold Nickel Tone	H30 H63 H70	4. WATTAGE 26 SIZE 30W H Series LED 63W H Series LED 38 SIZE 70W H Series LED 136W H Series LED	
		RD YL WH	Red (RAL 3020) Yellow (RAL 1018) White		H110 H215	50 SIZE 110W H Series LED 215W H Series LED

ACCESSORIES (field installed - order separately)

390001xx SCM Extension Kit: includes (1) 1' stem and (2) 2' stems.

5' combined max. Specify finish (xx)

SSM Extension Kit: includes (1) 1' stem and (2) 2' stems.

5' combined max. Specify finish (xx)

SUSPENSION FINISH

CC1 & CC3 ONLY Note: Finish applies to power cord and ceiling canopy.

BLC Black Cord GYC Grey Cord WHC White Cord

SSM & SCM ONLY

Note: Finish applies to stem and ceiling canopy.

Black Pastel Blue (RAL 5024) RU ΒZ Bronze GN Pastel Green (RAL 6019) MG

Metallic Gold Nickel Tone NT RD Red (RAL 3020) ΥL Yellow (RAL 1018)

WH White

SUSPENSION 6.

Cord & Single Cable (26" size only)

Cord & Three Cable CC3

SSM Single Stem Mount (26" size only)

SCM Stem & Cable Mount

7. **COLOR TEMPERATURE**

35K 3500K standard color temperature 30K 3000K color temperature 40K 4000K color temperature

8. (if required)

8. **AVAILABLE OPTIONS**

BAC¹ **Buy American Compliant** BBI2* Integral Battery Backup (8W)

Battery must be connected to continuous power supply within 7 Mo. of shipping. See Warranty Note 3.

CF1 3' - 10' Cord/Cable Extension (CC1 & CC3 only)

CE2 10' - 20' Cord/Cable Extension (CC1 & CC3 only)

DTR⁴ Triac (Line Voltage) Dimming (120V)

FCL7 French Canadian Labels

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. 1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW microwave motion sensor (do not combine with OCC option). Calinot be combined with DIT. (a) DIT. (b) Excannot be combined with BBL, BBC, or DITE. (b) Excannot be combined with BBC, BBC, or DITE. (c) Excannot be combined with BBC, BBC, or DITE. (b) Excannot be combined with BBC, BBC, or DITE. (c) Excannot be combined with BBC, BBC, DITE. (c) DIT Specifications and dimensions subject to change without notice.

