



GLW Trim

2690 LED

An architectural solution for the specification market, featuring a fully illuminated cylinder with an optional down light component. Perfect for “cluster” mounting in lobbies, high ceiling atriums, clubhouses, corridors, and more. Four lengths available - all in a consistent 4” diameter.

Custom finishes available. Refer to model #: 2680 for a cluster configuration. Refer to model #: 7490 for an outdoor/wipe-down version of this product.



DL6 Trim

HIGH BEAM

STANDARD SPECIFICATIONS

HOUSING + TRIM

Cold rolled steel trim parts and ceiling canopy. Aluminum internal LED assembly.

DIFFUSER

Translucent, UV stabilized white acrylic cylinder (4" dia.).

MOUNTING

Directly to j-box (by others). Internal mounting plate must also be anchored to ceiling surface (hardware by others). Refer to model #: 2890 for cluster mount configurations. Refer to model #: 7490 for an outdoor/wipe-down version of this product.

FINISH

FINISH 1: CEILING CANOPY + TOP & BOTTOM TRIM

Trim parts are prepared using a three step pre-treatment/sealing process, followed by a durable powder coat finish.

FINISH 2: POWER CORD

Power cord and strain reliefs are available in three finishes - Black, Grey, and White.

SUSPENSION

Unit ships with 10' of power cord as standard. Power cord can be trimmed in the field by a qualified electrical contractor. Refer to option code "CE2" for longer drops.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs

Amperage rated @ 110V input

Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

Standard 3500K delivered lumens noted. Consult Brownlee.com for performance of all CCTs.

CYLINDER AMBIENT PERFORMANCE - 90 CRI Standard

1' Size: 15W nominal, .13 A input - 1480 lm (Delivered). Dimmable (0-10V).

2' Size: 31W nominal, .27 A input - 3250 lm (Delivered). Dimmable (0-10V).

3' Size: 45W nominal, .39 A input - 5016 lm (Delivered). Dimmable (0-10V).

4' Size: 62W nominal, .54 A input - 7240 lm (Delivered). Dimmable (0-10V).

COB DOWN LIGHT PERFORMANCE (OPTIONAL) - 80 CRI*


60 Degree: 16W nominal, .14 A input - 1500 lm (Delivered). Dimmable (0-10V).

Dimming Note: Down Light is wired and can be controlled independently.

**Contact factory for 90 CRI down light.*

WARRANTY

5 year limited warranty on this LED product. Consult factory for details.


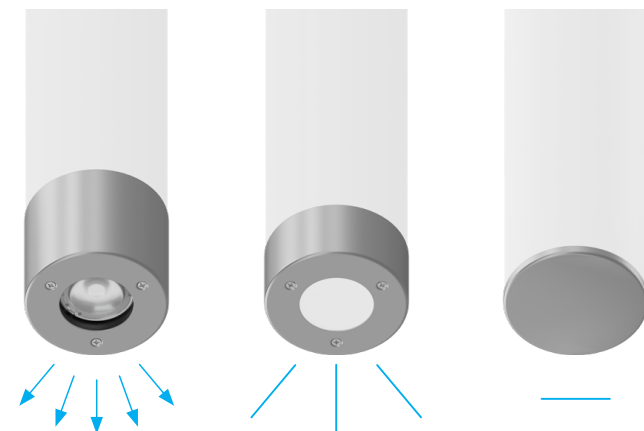


DOWN LIGHT
COB WITH OPTIC
1500 LUMENS DELIVERED

GLOW
AMBIENT GLOW -
NO USEABLE DOWNLIGHT

FLAT
END CAP -
NO DOWNLIGHT

PROJECT:
MODEL #:
FIXTURE TYPE:

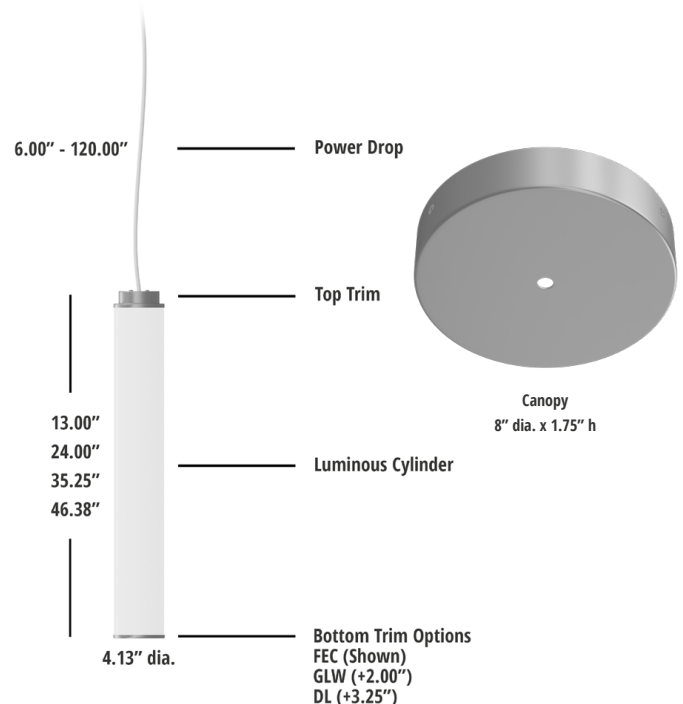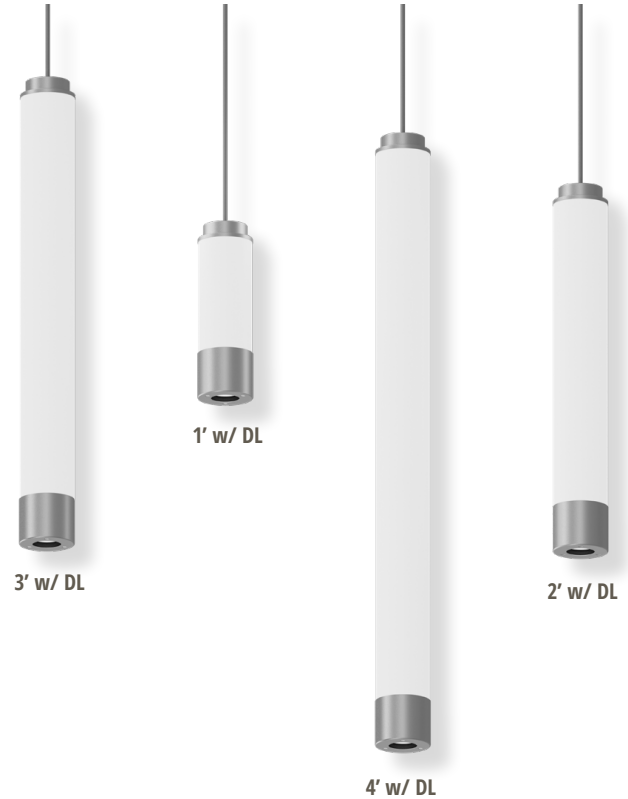

Specifications and dimensions subject to change without notice.
Consult your Brownlee Lighting representative for availability and ordering information.

HIGH BEAM



ORDERING INFORMATION

2690

Model

2.

3.

4.

5.

6.

7.

8. (if required)

2. SIZE

12	13" I
24	24" I
36	36" I
48	47" I

Note: Size refers to nominal diffuser length. Refer to line drawing.

3. FINISH

Canopy + Top & Bottom Trim

STANDARD	
BL	Black
BZ	Bronze
GM	Gun Metal
MB	Metallic Bronze
MG	Metallic Gold
NT	Nickel Tone
PL	Platinum
WH	White

Note: For further customization (i.e. alternating finishes for canopy and trim), contact factory.

ANTIMICROBIAL

Available in a select number of finishes. Refer to the Options section of this sheet for details ("AMF").

4. WATTAGE

12 SIZE	
H15	15W H Series LED
24 SIZE	
H30	31W H Series LED
36 SIZE	
H45	45W H Series LED
48 SIZE	
H60	62W H Series LED

5. CORD COLOR

Power Cord + Strain Reliefs

BLC	Black
GYC	Grey
WHC	White

6. TRIM

DL6	Down Light - 60 Deg. LED
GLW	Glow - Soft Glow
FEC	Flat End Cap

*Contact factory for DL3 (30 Deg. LED) option - limited stock available and non-returnable.

7. COLOR TEMPERATURE

35K	3500K standard color temperature
30K	3000K color temperature
40K	4000K color temperature

8. AVAILABLE OPTIONS

AMF	Antimicrobial Finish (BL, NT, WH only) (See AMF note)
BAC ¹	Buy American Compliant
CE2	Cord Extension: 20' Cord (total length)
DTR ⁴	Triac (Line Voltage) Dimming (120V)
FCL ⁷	French Canadian Labels

Note: Refer to model #: 2890 for a cluster mount configuration from a single canopy.

Note: Refer to model #: 7490 for an outdoor/wipe-down version of this product.

90 CRI standard on ambient cylinder output. 80 CRI on optional down light component.

AMF Note: Antimicrobial powder coat is applied to the exposed metal fixture parts and can inhibit the growth of mildew and spoilage causing microbes on the finish.

Universal Footnotes (only applies if option is listed on spec sheet): (0) 90R - 90 CRI output-loss multiplier: 0.85 (estimate). Cannot be combined with ES. (1) BAC - cannot be combined with FCL. (2) BBI/BBS/BBC - cannot be combined with ECW or EXT. (3) BLD - includes integral microwave motion sensor (do not combine with OCC option). Cannot be combined with DTR. (4) DTR - cannot be combined with BLD. (5) ECW - cannot be combined with BBI, BBC, or DTR. (6) ES - cannot be combined with 90R or T24. (7) FCL - cannot be combined with BAC. (8) OCC - integral microwave motion sensor (ON/OFF). (9) T24 - includes JA8 labeling and 90 CRI LEDs (do not combine with 90R option). Cannot be combined with ES. (10) PCH/PC4 - cannot be combined with BLD or OCC. **Add'l Notes:** *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F. **BLD - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%. 2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Configurable via onboard dip switches.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.