



Heather Grey



GEM ACOUSTIC UNLIT

A striking acoustic element, Gem's diamond-shaped PET felt fins deliver sound absorption without compromise, softening ambient noise while maintaining a refined, lightweight presence. This is an unlit (non-luminous) companion to the electrified version - Model #: 2756. Ideal for open-plan offices, hospitality, and collaborative spaces. Sculptural elegance with functional performance.

Other Gem models: Gem Acoustic (Model #: 2756), Gem Acoustic Cluster (Model #: 2856).

GEM ACOUSTIC - UNLIT

STANDARD SPECIFICATIONS

HOUSING + ACOUSTIC FINIS

Extruded aluminum cylinder. 60% Recycled PET acoustic felt fins, 9mm thick.

FINISH

Parts are prepared using a three step pre-treatment/cleaning process, followed by a powder coat finish.

NON-LUMINOUS

This is an unlit acoustic offering. Flat bottom cap, no electronics. Refer to Model #: 2756 for luminous.

SUSPENSION

Single aircraft cable with cable coupler, or rigid stem with canopy. Max fixture weight: 10 lbs.

MOUNTING

Aircraft cable coupler (provided) must be anchored to ceiling surface. Anchoring hardware by others (i.e. drywall anchor, tapcon, 1/4-20 anchor stud, etc.). For rigid stem mounting, canopy is to be anchored to ceiling surface. Anchoring hardware by others (i.e. drywall anchor, tapcon). Note: This is NOT a lighting fixture - do not electrify or mount to electrical box.

ACOUSTIC MATERIAL INFORMATION

9mm fins are 100% polyester [PET] containing up to 60% recycled plastic material. ASTM E-84 Class A fire rating. Slight color and surface deviations due to high degree of recycled fiber are an inevitable characteristic and do not claim warranty services. Material color varies from screen to print. Contact factory for swatch samples. Color offering subject to change without notice.

ACOUSTIC PERFORMANCE TESTING

Fixtures tested in accordance with ASTM C423-23: "Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method." Gem F20 was tested - data was extrapolated for other sizes based on square footage of absorbing material. Weighted sound absorption coefficient of the PET material = .85.

ACOUSTIC MATERIAL CLEANING

Remove dust with soft, lint-free cloth or vacuum. Remove stains using water and mild soap with a clean cloth or sponge and allow to air dry. Do not aggressively scrub.

WARRANTY

5 year limited warranty on this product.

ORDERING INFORMATION

PROJECT:

MODEL #:

FIXTURE TYPE:



2757

1. Model - 2. - 3. - 4. - 5. - 6.

2. FINISH

Applies to primary cylinder, ceiling canopy, and rigid stem if specified.

BL	Black
BU	Pastel Blue
BZ	Bronze
GN	Pastel Green
MG	Metallic Gold
NT	Nickel Tone
OR	Florida Orange
RD	Red
WH	White
YL	Yellow

3. FIN DESIGN

Refer to Page 2 for dimensional diagram.

F01	F01 Single
F02	F01 / F01 Stack
F03	F01 / F01 / F01 Stack
F04	F08 / F01 Stack
F05	F01 / F08 / F01 Stack
F06	F15 / F01 Stack
F07	F20 / F01 Stack
F08	F08 Single
F09	F01 / F08 Stack
F10	F08 / F01 / F08 Stack
F11	F08 / F08 Stack
F12	F08 / F08 / F08 Stack
F13	F15 / F08 Stack
F14	F20 / F08 Stack
F15	F15 Single
F16	F01 / F15 Stack
F17	F08 / F15 Stack
F18	F15 / F15 Stack
F19	F20 / 15 Stack
F20	F20 Single
F21	F01 / F20 Stack
F22	F08 / F20 Stack
F23	F15 / F20 Stack
F24	F20 / F20 Stack

4. ACOUSTIC FIN COLOR

Applies to PET fins. Refer to swatches.

STANDARD

Standard lead time and pricing.

GPH	Graphite
HGY	Heather Grey
MBL	Marble

PREMIUM

6-8 week lead time. Pricing adder.

ABY	Abyss
BLK	Black
FRS	Forest
GRG	Greige
GRN	Green
NVY	Navy
ORA	Orange
RED	Red
SND	Sand
VLV	Violet
WHT	White
YEL	Yellow

5. SUSPENSION

CE1	10' of Aircraft Cable
CE2	20' of Aircraft Cable

Field cuttable. Includes anchoring coupler (hardware by others).

S06	Rigid Stem - 6"
S12	Rigid Stem - 12"
S24	Rigid Stem - 24"
S36	Rigid Stem - 36"
S48	Rigid Stem - 48"

Contact factory for custom stem drops. Provide desired overall height (OAH) from ceiling to fixture bottom.

6. AVAILABLE OPTIONS


BAC ¹	Buy American Compliant
FCL ⁷	French Canadian Labels

Specifications subject to change without notice.


GEM ACOUSTIC - FIN DESIGN

STANDARD FIN OFFERING


Height: 16.75"

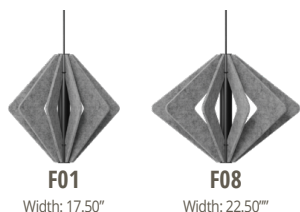


Height: 28.50"

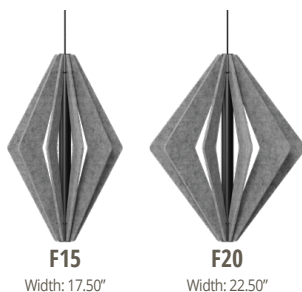


Height: 33.00"

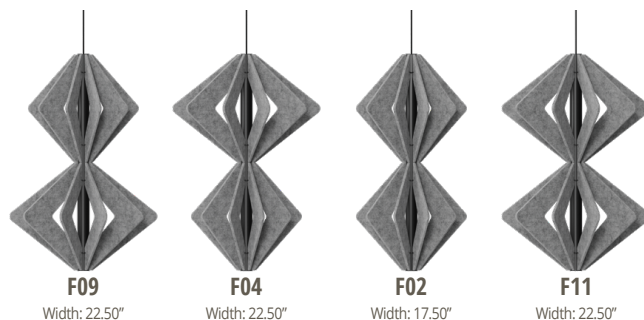


Height:
45.00"

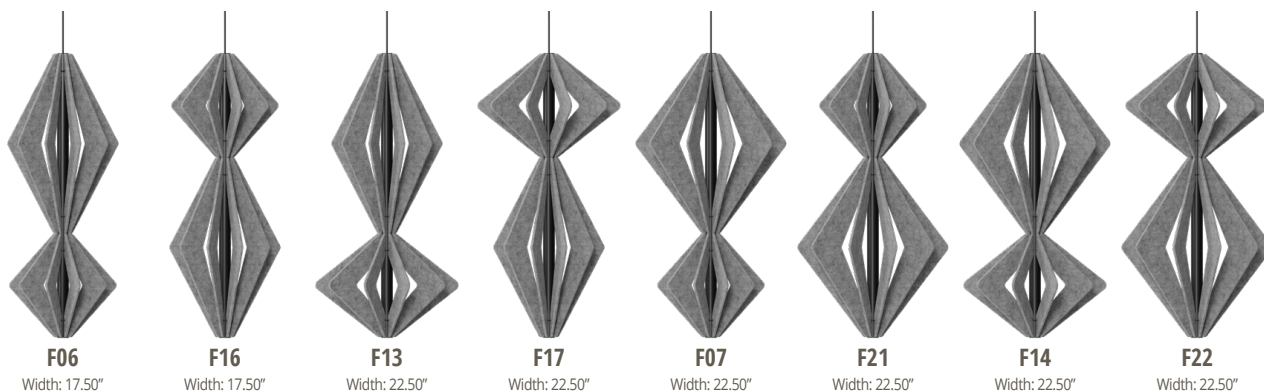

Height:
49.50"

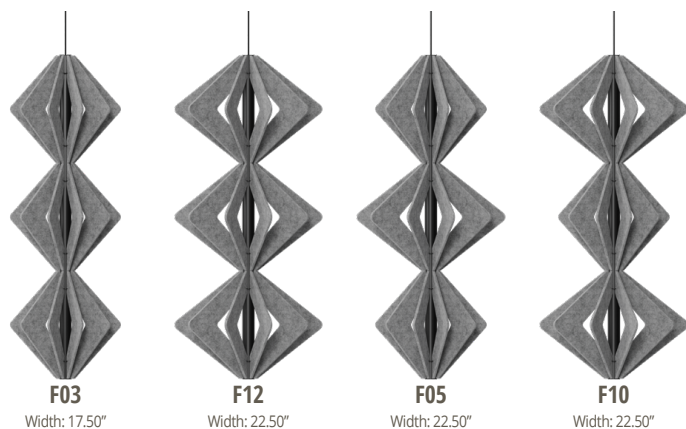

Height:
57.00"

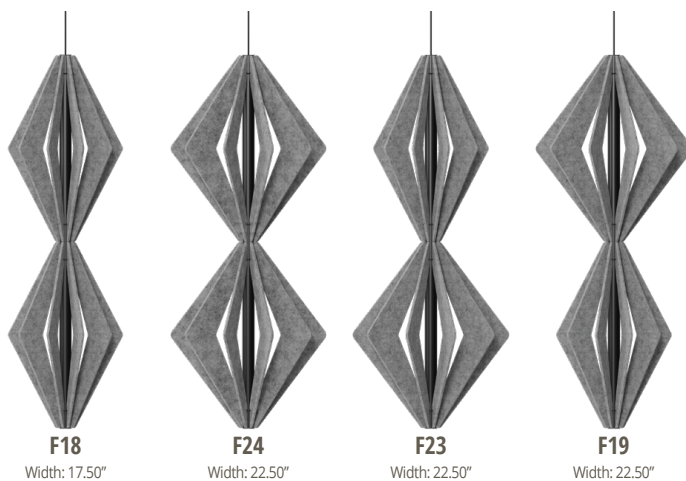

STANDARD ACOUSTIC COLORS STANDARD LEAD TIME & PRICING



PREMIUM ACOUSTIC COLORS 6-8 WEEK LEAD TIME, PRICING ADDER



GEM ACOUSTIC - UNLIT

ACOUSTIC INFORMATION & PERFORMANCE

1/3 Octave (Hz)	F01	F08	F15	F20	F09	F17	F10	F23
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
250	0.65	0.81	1.03	1.31	1.46	1.84	2.26	2.34
500	1.63	2.03	2.59	3.29	3.66	4.61	5.68	5.88
1000	3.16	3.92	5.01	6.37	7.08	8.93	11.01	11.38
2000	3.68	4.57	5.83	7.42	8.25	10.40	12.82	13.25
4000	4.69	5.83	7.44	9.47	10.53	13.27	16.96	16.91
Avg. at 250 to 2000 Hz	2.76	3.43	4.38	5.57	6.19	7.81	9.63	9.95
SqFt. Acoustic Material	7.64	9.51	12.22	15.55	17.15	21.73	26.66	27.77

ACOUSTIC PERFORMANCE TESTING

Fixtures tested in accordance with ASTM C423-23: "Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method." Gem F20 was tested - data was extrapolated for other sizes based on square footage of absorbing material. Weighted sound absorption coefficient of the PET material = .85.

