

SHADER DEEP

STANDARD SPECIFICATIONS

SHADE

The shade is constructed from traditional lampshade material with a polyethylene liner, wrapped around a steel frame. It is available in multiple materials, divided into two pricing tiers.

TRIM

Cold rolled steel stem and canopy, and additional aircraft cable accents. The lower cover is held in place with a solid brass finial. All trim pieces available in all Brownlee paint finishes.

DIFFUSER

A white acrylic cover is located on both the top and the bottom of the shade.

HOUSING

Formed, cold rolled steel design, finished in a high reflectance powder coat white.

LED PERFORMANCE - 3500K STANDARD

120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
 Amperage rated @ 110V input
 Operating ambient temperature: -20°C / -4°F - 40°C / 104°F

3500K delivered lumens noted. Consult Brownlee.com for performance of all CCTs.
 C49 - 45W nominal, .40 A input - 4265 lm. Dimmable (0-10V).

MOUNTING

Directly to j-box (by others). Mounting hardware included.

FINISH

The 2070 series is available in all Brownlee paint finishes as a standard offering.


WARRANTY

5 year limited warranty on this LED product. Consult factory for details.

PROJECT:
MODEL #:
FIXTURE TYPE:



BZ finish, SN2 diffuser

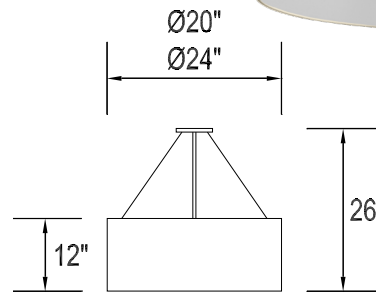

DAMP



ORDERING INFORMATION

2070 - _____
 Model 2. 3. 4. 5. 6. 7. (if required)

2. SIZE	3. FINISH	4. WATTAGE	5. DIFFUSER	6. AVAILABLE OPTIONS
20 20" dia.	STANDARD	C49 45W C Series LED	TIER 1	35K 3500K standard color temperature
24 24" dia.	BL Black		SN1 Satin Weave - White	27K 2700K color temperature
	BZ Bronze		SN2 Satin Weave - Ivory	30K 3000K color temperature
	GM Gun Metal		TIER 2	40K 4000K color temperature
	MB Metallic Bronze		GR1 Grasscloth - Natural	
	MG Metallic Gold		BK1 Black Linen	
	NT Nickel Tone			
	PL Platinum			
	WH White			
	CUSTOM			
	Provide color sample or RAL code to match			
				7. AVAILABLE OPTIONS
				90R⁹ 90 CRI (3000K only)
				BAC¹ Buy American Compliant
				DTR⁴ Triac (Line Voltage) Dimming (120V)
				ES⁶ ENERGY STAR® (Not available in 90 CRI)
				FCL⁷ French Canadian Labels
				T24⁹ Title 24 Compliant (3000K only)

ACCESSORIES (field installed - order separately)
390001xx SCM Extension Kit: includes (1) 1' stem and (2) 2' stems. 5' combined max. Specify finish (xx)

Notes: (0) **90R** - cannot be combined with ES or T24 (1) **BAC** - cannot be combined with FCL (2) **BBI/BBS/BBC** - cannot be combined with DTR, ECW, EXT, or T24 (3) **BLD** - cannot be combined with DTR, OCC, or T24 (4) **DTR** - cannot be combined with BBI, BBC, BBS, BLD or T24 (5) **ECW** - cannot be combined with BBI, BBC, or DTR (6) **ES** - cannot be combined with 90R, FCL, or T24 (7) **FCL** - cannot be combined with BAC, ES, or T24 (8) **OCC** - cannot be combined with BLD (9) **T24** - cannot be combined with 90R, BBI, BBC, BBS, BLD, DTR, ES, or FCL (10) **BBS** - cannot be combined with BLD, DTR, ECW, EXT, OCC, or T24 (11) **PCH/PC4** - cannot be combined with BLD or OCC

Add'l Notes: ***BBI/BBS/BBC** - standard BBI (and BBS) option has a minimum operating temperature of 10C/50F. BBC option has a minimum operating temperature of -20C/-4F. ****BLD** - Bi-Level Dimming is field adjustable from 100% to a dimmed light level of 10, 20, 30, or 50%. All units are factory set at 50%.

Specifications and dimensions subject to change without notice.

Consult your Brownlee Lighting representative for availability and ordering information.

